



Europäisches Patentamt
European Patent Office
Office européen des brevets



EP 0 719 824 A2

EUROPEAN PATENT APPLICATION

(43) Date of publication
03.07.1996 Bulletin 1996/27

(21) Application number 95810801.1

(22) Date of filing 18.12.1995

(51) Int. Cl. 6 C08K 5/00, C08K 3/00
// (C08K5/00, 5:098, 5:13,
5:3435, 5:52),
(C08K3/00, 3:22, 3:26, 3:34)

(84) Designated Contracting States
AT BE CH DE DK ES FR GB IT LI NL PT SE

(30) Priority 28.12.1994 US 365262
12.04.1995 US 420388

(71) Applicant CIBA-GEIGY AG
CH-4002 Basel (CH)

(72) Inventors
• Thibaut, Daniel
F-68730 Michelbach-le-Bas (FR)
• Breitenstein, Benjamin
CH-4310 Rheinfelden (CH)
• Kirchberger, Linda
Franklin Lakes, New Jersey 07417 (US)

(54) Low-dust granules of plastic additives

(57) Low-dust granules of plastic additives comprising at least 10 % by weight of calcium stearate where the water content of the calcium stearate is less than 2 %, having a particle size distribution in accordance with ISO 3435 of from 1 mm to 10 mm, a loose bulk density of greater than 400 g/l and a flowability in accordance with DIN 53492 of less than 15 s (tR25), a process for their production, and the use of these granules for the stabilization of organic polymers

ance with ISO 3435 of from 1 mm to 10 mm, a loose bulk density of greater than 400 g/l and a flowability in accordance with DIN 53492 of less than 15 s (tR25), a process for their production, and the use of these granules for the stabilization of organic polymers

D1 zu #3722 PCT

EP 0 719 824 A2

Description

The present invention relates to low-dust granules of plastic additives which contain calcium stearate to a process for the production of these granules and to the use of these granules for the stabilization of plastics

Organic polymers (plastics) in particular polyolefins generally require the addition of additives in order to be processed and in order to retain the service properties for a long period. Damaging influences for organic polymers, besides light and heat, are also residues of the catalysts used for the preparation. The prior art discloses a very wide variety of substance classes which can be used as additives and stabilizers. Due to the variety of processes, not all of which are understood in detail for damage to organic polymers, mixtures of a plurality of additives are frequently employed.

In general, the additives are in powder form. However, additive mixtures in powder form have a number of disadvantages, such as dusting, even as far as dust explosion, tendency toward separation and also metering difficulties. For this reason, there is a demand for commercial forms which do not have these disadvantages. To this end, for example, agglomeration processes (aqueous and if appropriate using a disperser), mixing processes with binders or compacting using a pellet press are described. In most cases, however, the resultant commercial forms still do not have adequate mechanical properties. The commercial forms frequently also contain water or other binders, which can cause problems during subsequent incorporation to an organic polymer or requires particular measures. There is therefore a desire for granular additive mixtures with a long shelf life which contain no binders. A granular material of this type which also satisfies the increasingly important ecological aspect (low dust, material saving by omitting the binder) is also desirable.

To this end, U.S. Patent No. 5,240,642 describes a process for obtaining granular forms of organic acid and inorganic antiacid additives and tetrakis[3-(3,5-di-tert-butyl-4-hydroxyphenyl)-propionyloxymethyl]methane, which process is carried out in the presence of the latter material in the molten state, homogeneously distributing said material throughout the antiacid powder mass, extruding the mass, cooling the extruded strands and subsequently forming granules. Unfortunately, the granules obtained by said process are characterized by several deficiencies, namely these granules still emit an appreciable amount of dust, which is particularly harmful to workers in the industry working on large-scale processes, have a tendency to separate during storage and transport, and have metering difficulties associated therewith.

Surprisingly, granules of plastic additives which satisfy the requirements of industry to a large extent are obtained in accordance with the instant invention by warming a mixture of plastic additives and calcium stearate until at least 80 % of the calcium stearate component has melted, and carrying out the subsequent molding in the plastic state.

The novel granules of plastic additives are very uniform and are distinguished by excellent bulk material properties, in particular freedom from dust, flowability and abrasion resistance, and by a good shelf life. They can be metered very well into the organic polymers to be stabilized and have a thermally better melting behavior than conventional calcium stearates or calcium stearate powder mixtures.

The invention accordingly relates, in addition to the process described in greater detail below, to low-dust granules of plastic additives comprising at least 10 % by weight of calcium stearate, where the water content of the calcium stearate is less than 2 %, having a particle size distribution, in accordance with ISO 3435, of from 1 mm to 10 mm, a loose bulk density of greater than 400 g/l and a flowability in accordance with DIN 53492 of less than 15 s (tR25).

For the purposes of the present invention, the term "low-dust granules" is taken to mean granules whose dust emission in the Heubach test is less than 0.15 % by weight (after 5 minutes).

In the remainder of the description, the term "novel granules" is taken to mean the low-dust granules defined as above.

For the purposes of this invention, calcium stearate is taken to mean a product of the reaction of commercially available fatty acid mixtures and a calcium compound. Commercially available fatty acid mixtures comprise a mixture of C₁₄-C₂₀ fatty acids with a predominant content of stearic acid and frequently also palmitic acid, for example about 67 % of stearic acid and 33 % of palmitic acid. In accordance with the invention, the calcium stearate has a low content of water of crystallization, i.e. it is substantially amorphous. Depending on environmental influences (for example storage conditions) and the thermal history, the total water content of calcium stearate or the calcium stearate component can vary, but is preferably less than 1 %.

In a preferred embodiment, the novel granules comprise at least 20 % by weight, and particularly preferably at least 30 % by weight or 100 % by weight, of calcium stearate.

The particle size distribution of the novel granules, defined in accordance with ISO 3435, is preferably from 1 mm to 6 mm, particularly preferably from 2 mm to 6 mm.

The loose bulk density is preferably greater than 500 g/l, but it depends on the density of the overall mixture and can be higher or lower in mixtures whose density differs greatly from that of calcium stearate. The stated values therefore relate to mixtures in which the density is no more than 10 % different from that of calcium stearate. If the density of the mixture differs by a greater amount, the bulk density should be corrected by a factor given by the ratio between the density of calcium stearate and the density of the mixture.

in accordance with the invention the flowability determined in accordance with DIN 53492 is preferably less than 16 s (R15), most preferably less than 10 s (R15).

The dust emission is determined by the Heubach test in an experimental set-up similar to practical conditions where the test material is kept in motion in order to determine the dusting tendency due to abrasion. The apparatus used is produced by Heubach Engineering GmbH, Langerloshem (DE). In detail, the test material (sample weight 50 g) is moved at 30 rpm (corresponding to a peripheral speed of 19 cm/sec) for 5 minutes in a dust formation unit with a capacity of 2.5 m³ in which three chicanes are arranged in the rotation direction at an angle of 45° to the housing wall while a 0.32 Vsec stream of air deposits the fine component on a filter. In accordance with the invention, the fine content determined in this way preferably does not exceed 0.1 % by weight.

The other plastic additives which may be present according to the invention in the granules are known per se either alone or in various combinations. Many of the plastic additives described below are commercially available. The other plastic additives can be prepared by known processes and under standard conditions, are in the form of solids (for example powders or granules), melts (for example directly from the synthesis) or liquids.

The present invention furthermore relates to a process for the production of granules of plastic additives which comprises warming a mixture of plastic additives comprising at least 10 and up to 100 % by weight of calcium stearate until at least 80 % by weight of the calcium stearate component has melted, forcing the mixture through a plate provided with nozzles or holes where the nozzle or hole diameter is from 1 to 10 mm, and chopping the resultant extrudate in the plastic state to give granules. The term "plastic state" refers to the strands which are not yet solidified; the strands are in the non-rigid state and with regard to the viscosity, the strands have in general a viscosity in the range from 1 to 500000 Pa·s, preferably from 1 to 100000 Pa·s.

The nozzle or hole diameter is preferably from 2 to 6 mm.

The plastic additives (or calcium stearate) are advantageously melted in a single- or twin-screw extruder, such extruders are known in the plastics-processing industry and are marketed, for example, by Buss (CH), Brabender (DE), Werner und Pfleiderer (DE) or Bühler (CH). Plastic additives here are generally employed as solids (for example powders or granules) but it is also possible to employ melts, aqueous suspensions or, in minor amounts, liquid additives. After or alternatively during the chopping of the extrudates, which takes place in the still-soft state and after passage through a nozzle or perforated disk, the granule particles are cooled. Cooling can be carried out in the form of wet cooling with water (for example in water, by a water film, water ring, etc.) or preferably by means of air (for example an air film, air vortex, etc.) or by combination. If water cooling is used, subsequent dewatering and drying (preferably in a fluidized-bed drier) is necessary. These cooling methods are known in their industrial implementations. It is essential that the granulation takes place in the plastic state before the actual cooling step, in contrast to the extrusion granulation and grinding processes conventional in industry.

The preparation of the calcium stearate-containing melt is usually not carried out at a single constant temperature but instead the material passes through a temperature profile in a continuous process. A peak temperature of above 130°C is expediently achieved here, peak temperatures of above 150°C being preferred, depending on the other mixture components, and peak temperatures of up to 220°C generally being suitable. These temperatures relate to the temperature of the material.

Preference is furthermore given to a process which additionally includes degassing. When the process is carried out, this degassing facility is preferably installed in a zone in which the calcium stearate is melted or in a subsequent zone.

The granules are preferably produced using an extruder, a material temperature of above 130°C being achieved at at least one point within the extruder.

The plastic additive granules obtained by the present process are likewise a subject-matter of the present invention. The preferences described apply analogously here.


The other plastic additives which may be present in the granules according to the invention are preferably compounds selected from the group consisting of sterically hindered amines (HALS), sterically hindered phenols, phosphites or phosphonites, hydrotalcites, metal oxides, metal carbonates, further metal soaps, antistatics, antiblocking agents, flameproofing agents, thioesters, internal and external lubricants, pigments, UV absorbers and further light stabilizers.

The granules can furthermore also contain additional substances, such as, for example, thermoplastic polymers (for example polyolefins or polyolefin waxes).

A particularly preferred embodiment of the invention is the combination of calcium stearate with at least one antioxidant of the sterically hindered phenol type and at least one phosphite or phosphonite. Particular preference is furthermore given to the combination of calcium stearate with at least one compound from the group consisting of sterically hindered amines containing at least one 2,2,6,6-tetramethylpiperidine radical.

A very particularly preferred embodiment of the invention is the combination of calcium stearate with at least one antioxidant of the sterically hindered phenol type and at least one phosphite or phosphonite and at least one compound from the group consisting of sterically hindered amines containing at least one 2,2,6,6-tetramethylpiperidine radical.

The sterically hindered amines, preferably piperidine compounds, are principally known as light stabilizers. These compounds contain one or more groups of the formula I




(I).

These can be compounds of relatively low molecular weight (<700) or of relatively high molecular weight. In the latter case, they can also be oligomeric or polymeric products.

Particularly important stabilizers are the following classes of tetramethylpiperidine compounds

a) Compounds of the formula II

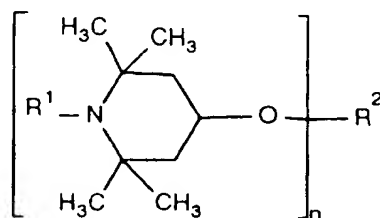

(II).

in which n is a number from 1 to 4, preferably 1 or 2

R¹ is hydrogen, oxyl, C₁-C₁₂alkyl, C₃-C₈alkenyl, C₃-C₈alkynyl, C₇-C₁₂aralkyl, C₁-C₈alkanoyl, C₃-C₅alkenoyl, glycidyl or a -CH₂CH(OH)-Z group, in which Z is hydrogen, methyl or phenyl, R¹ preferably being C₁-C₄alkyl, allyl, benzyl, acetyl or acryloyl and

R² if n is 1, is hydrogen, C₁-C₁₈alkyl which is uninterrupted or interrupted by one or more oxygen atoms, cyanoethyl, benzyl, glycidyl, a monovalent radical of an aliphatic, cycloaliphatic, araliphatic, unsaturated or aromatic carboxylic acid, carbamic acid or phosphorus-containing acid or a monovalent silyl radical, preferably a radical of an aliphatic carboxylic acid having 2 to 18 carbon atoms, a cycloaliphatic carboxylic acid having 7 to 15 carbon atoms, an α, β-unsaturated carboxylic acid having 3 to 5 carbon atoms or an aromatic carboxylic acid having 7 to 15 carbon atoms

if n is 2, R² is C₁-C₁₂alkylene, C₄-C₁₂alkenylene, xylylene, a divalent radical of an aliphatic, cycloaliphatic, araliphatic or aromatic dicarboxylic acid, dicarbamic acid or phosphorus-containing acid or a divalent silyl radical, preferably a radical of an aliphatic dicarboxylic acid having 2 to 36 carbon atoms, a cycloaliphatic or aromatic dicarboxylic acid having 8 - 14 carbon atoms or an aliphatic, cycloaliphatic or aromatic dicarbamic acid having 8 - 14 carbon atoms; if n is 3, R² is a trivalent radical of an aliphatic, cycloaliphatic or aromatic tricarboxylic acid, an aromatic tricarboxylic acid or a phosphorus-containing acid or a trivalent silyl radical, and

if n is 4, R² is a tetravalent radical of an aliphatic, cycloaliphatic or aromatic tetracarboxylic acid

Any C₁-C₁₂alkyl substituents are, for example, methyl, ethyl, n-propyl, n-butyl, sec-butyl, tert-butyl, n-hexyl, n-octyl, 2-ethylhexyl, n-nonyl, n-decyl, n-undecyl or n-dodecyl

C₁-C₁₈alkyl R² can be, for example, the groups mentioned above and in addition, for example, n-tridecyl, n-tetradecyl, n-hexadecyl or n-octadecyl.

C₃-C₈alkenyl R¹ can be, for example, 1-propenyl, allyl, methallyl, 2-butenyl, 2-pentenyl, 2-hexenyl, 2-octenyl or 4-tert-butyl-2-butenyl

C₃-C₈alkynyl R¹ is preferably propargyl.

C₇-C₁₂aralkyl R¹ is, in particular, phenethyl and especially benzyl.

C₁-C₈alkanoyl R¹ is, for example, formyl, propionyl, butyryl, octanoyl, but preferably acetyl, and C₃-C₅alkenoyl R¹ is, in particular, acryloyl.

If R² is a monovalent radical of a carboxylic acid, it is, for example, an acetyl, caproyl, stearoyl, acryloyl, meth-

acryloyl, benzoyl, or 3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionyl radical.

* R² is a divalent radical of a dicarboxylic acid, it is, for example, a malonyl, succinyl, glutaryl, adipoyl, suberoyl, sebacoyl, maleoyl, phthaloyl, dibutylmalonyl, dibenzylmalonyl, butyl(3,5-di-tert-butyl-4-hydroxybenzyl)malonyl, or di(3,5-di-tert-butyl-4-hydroxybenzyl)malonyl radical.

* R³ is a trivalent radical of a tricarboxylic acid, it is, for example, a trimellityl or tris(trimellityl) radical.


* R⁴ is a tetravalent radical of a tetracarboxylic acid, it is, for example, the tetravalent radical of butane-1,2,3,4-tetracarboxylic acid or of pyromellitic acid.

* R⁵ is a divalent radical of a dicarbamic acid, it is, for example, a hexamethylenedicarbamoyl, or 2,4-tolylenebicarbamoyl radical.

Examples of polyalkylpiperidine compounds from this class are the following compounds:

- 1) 4-hydroxy-2,2,6,6-tetramethylpiperidine
- 2) 1-allyl-4-hydroxy-2,2,6,6-tetramethylpiperidine
- 3) 1-benzyl-4-hydroxy-2,2,6,6-tetramethylpiperidine
- 4) 1-(4-tert-butyl-2-butenyl)-4-hydroxy-2,2,6,6-tetramethylpiperidine
- 5) 4-stearoyloxy-2,2,6,6-tetramethylpiperidine
- 6) 1-ethyl-4-salicyloyloxy-2,2,6,6-tetramethylpiperidine
- 7) 4-methacryloyloxy-1,2,2,6,6-pentamethylpiperidine
- 8) 1,2,2,6,6-pentamethylpiperidin-4-yl [3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate
- 9) di(1-benzyl-2,2,6,6-tetramethylpiperidin-4-yl) maleate
- 10) di(2,2,6,6-tetramethylpiperidin-4-yl) succinate
- 11) di(2,2,6,6-tetramethylpiperidin-4-yl) glutarate
- 12) di(2,2,6,6-tetramethylpiperidin-4-yl) adipate
- 13) di(2,2,6,6-tetramethylpiperidin-4-yl) sebacate
- 14) di(1,2,2,6,6-pentamethylpiperidin-4-yl) sebacate
- 15) di(1,2,3,6-tetramethyl-2,6-diethylpiperidin-4-yl) sebacate
- 16) di(1-allyl-2,2,6,6-tetramethylpiperidin-4-yl) phthalate
- 17) 1-propargyl-4-[3-cyanoethyloxy-2,2,6,6-tetramethylpiperidine
- 18) 1-acetyl-2,2,6,6-tetramethylpiperidin-4-yl acetate
- 19) tri(2,2,6,6-tetramethylpiperidin-4-yl) trimellitate
- 20) 1-acryloyl-4-benzyloxy-2,2,6,6-tetramethylpiperidine
- 21) di(2,2,6,6-tetramethylpiperidin-4-yl) diethylmalonate
- 22) di(1,2,2,6,6-pentamethylpiperidin-4-yl) dibutylmalonate
- 23) di(1,2,2,6,6-pentamethylpiperidin-4-yl) butyl(3,5-di-tert-butyl-4-hydroxybenzyl)malonate
- 24) di(1,2,2,6,6-pentamethylpiperidin-4-yl) dibenzylmalonate
- 25) di(1,2,3,6-tetramethyl-2,6-diethylpiperidin-4-yl) dibenzylmalonate
- 26) hexane-1',6'-bis(4-carbamoyloxy-1-n-butyl-2,2,6,6-tetramethylpiperidine)
- 27) toluene-2',4'-bis(4-carbamoyloxy-1-n-propyl-2,2,6,6-tetramethylpiperidine)
- 28) dimethylbis(2,2,6,6-tetramethylpiperidin-4-oxo)silane
- 29) phenyltris(2,2,6,6-tetramethylpiperidin-4-oxo)silane
- 30) tris(1-propyl-2,2,6,6-tetramethylpiperidin-4-yl) phosphite
- 31) tris(1-propyl-2,2,6,6-tetramethylpiperidin-4-yl) phosphate
- 32) phenyl bis-(1,2,6,6-pentamethylpiperidin-4-yl) phosphonate
- 33) 4-hydroxy-1,2,2,6,6-pentamethylpiperidine
- 34) 4-hydroxy-N-hydroxyethyl-2,2,6,6-tetramethylpiperidine
- 35) 4-hydroxy-N-(2-hydroxypropyl)-2,2,6,6-tetramethylpiperidine
- 36) 1-glycidyl-4-hydroxy-2,2,6,6-tetramethylpiperidine

b) Compounds of the formula (III)

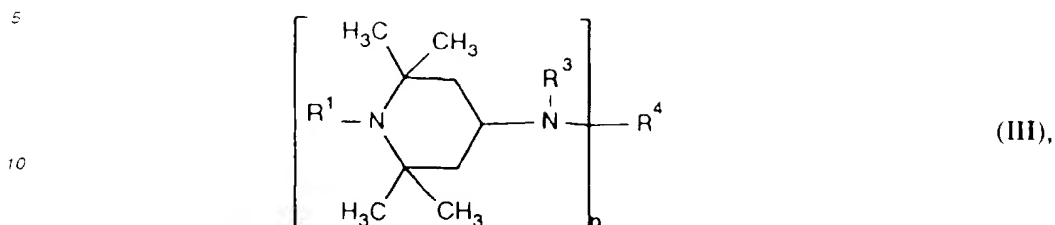

15 in which n is the number 1 or 2.

R¹ is as defined under a).

R³ is hydrogen, C₁-C₁₂alkyl, C₂-C₅hydroxyalkyl, C₅-C₇cycloalkyl, C₇-C₈aralkyl, C₂-C₁₈alkanoyl, C₃-C₅alkenoyl or benzoyl and

20 R⁴ if n is 1 is hydrogen, C₁-C₁₈alkyl, C₃-C₈alkenyl, C₅-C₇cycloalkyl, C₁-C₄alkyl which is substituted by a hydroxyl, cyano, alkoxy, carbonyl or carbamate group, glycidyl, a group of the formula -CH₂-CH(OH)-Z or of the formula -CONH-Z, in which Z is hydrogen, methyl or phenyl.

25 if n is 2 R⁴ is C₂-C₁₂alkylene, C₆-C₁₂arylene, xylylene, a -CH₂-CH(OH)-CH₂- group or a -CH₂-CH(OH)-CH₂-O-D-O- group, in which D is C₂-C₁₀alkylene, C₆-C₁₅arylene or C₆-C₁₂cycloalkylene, or with the proviso that R³ is alkanoyl, alkenoyl or benzoyl. R⁴ can alternatively be a divalent radical of an aliphatic, cycloaliphatic or aromatic dicarboxylic acid or dicarbamic acid or alternatively the group -CO-, or R³ and R⁴ together if n = 1 can be the divalent radical of an aliphatic, cycloaliphatic or aromatic 1,2- or 1,3-dicarboxylic acid

30 Any C₁-C₁₂- or C₁-C₁₈-alkyl substituents are as defined above under a).

Any C₅-C₇cycloalkyl substituents are, in particular, cyclohexyl.

C₇-C₈aralkyl R³ is, in particular, phenylethyl or especially benzyl. C₂-C₅Hydroxyalkyl R³ is, in particular, 2-hydroxyethyl or 2-hydroxypropyl.

C₂-C₁₈alkanoyl R³ is, for example, propionyl, butyryl, octanoyl, dodecanoyl, hexadecanoyl, octadecanoyl but preferably acetyl, and C₃-C₅alkenoyl R³ is, in particular, acryloyl.

35 C₂-C₈alkenyl R⁴ is, for example, allyl, methallyl, 2-butenyl, 2-pentenyl, 2-hexenyl or 2-octenyl.

Hydroxyl-, cyano-, alkoxy, carbonyl- or carbamate-substituted C₁-C₄alkyl R⁴ can be, for example, 2-Hydroxyethyl, 2-hydroxypropyl, 2-cyanoethyl, methoxycarbonylmethyl, 2-ethoxycarbonyl-ethyl, 2-aminocarbonylpropyl or 2-(dimethylaminocarbonyl)ethyl.

40 Any C₂-C₁₂alkylene substituents are, for example, ethylene, propylene, 2,2-dimethylpropylene, tetramethylene, hexamethylene, octamethylene, decamethylene or dodecamethylene.

Any C₆-C₁₅arylene substituents are, for example, o-, m- or p-phenylene, 1,4-naphthylene or 4,4'-diphenylene.

C₆-C₁₂cycloalkylene D is, in particular, cyclohexylene.

Examples of polyalkylpiperidine compounds from this class are the following compounds:

45 37) N,N'-bis(2,2,6,6-tetramethylpiperidin-4-yl)-hexamethylene-1,6-diamine

38) N,N'-bis(2,2,6,6-tetramethylpiperidin-4-yl)-hexamethylene-1,6-diacetamide

39) 1-acetyl-4-(N-cyclohexylacetamido)-2,2,6,6-tetramethylpiperidine

40) 4-benzoylamino-2,2,6,6-tetramethylpiperidine

41) N,N'-bis(2,2,6,6-tetramethylpiperidin-4-yl)-N,N'-dibutyladipamide

50 42) N,N'-bis(2,2,6,6-tetramethylpiperidin-4-yl)-N,N'-dicyclohexyl-2-hydroxypropylene-1,3-diamine


43) N,N'-bis(2,2,6,6-tetramethylpiperidin-4-yl)-p-xylylene-diamine

44) N,N'-bis(2,2,6,6-tetramethylpiperidin-4-yl)succinamide

45) di(2,2,6,6-tetramethylpiperidin-4-yl)


N-(2,2,6,6-tetramethylpiperidin-4-yl)-β-aminodipropionate

55 46) the compound of the formula

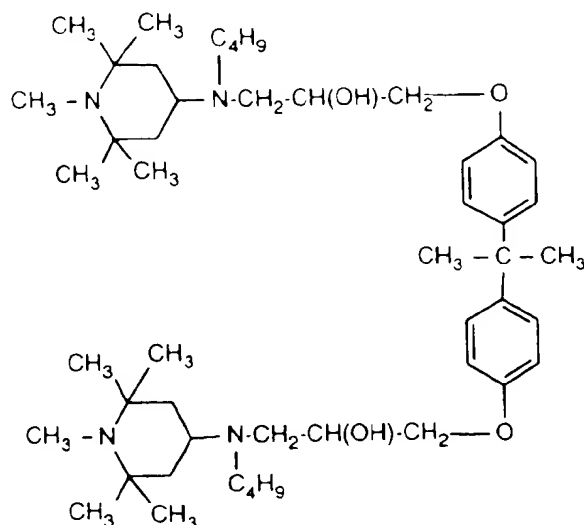

- 47) 4-(bis-2-hydroxyethylamino)-1,2,2,6,6-pentamethylpiperidine
 48) 4-(3-methyl-4-hydroxy-5-tert-butylbenzamido)-2,2,6,6-tetramethylpiperidine
 49) 4-methacrylamido-1,2,2,6,6-pentamethylpiperidine

c) Compounds of the formula (IV)



(IV),

in which

n is the number 1 or 2

R¹ is as defined under a) and

R⁵ if n is 1 is C₂-C₆alkylene, C₂-C₆hydroxyalkylene or C₄-C₂₂acyloxyalkylene and if n is 2 R⁵ is the (-CH₂)₂C(CH₂)₂ group




C₂-C₆Alkylene or -hydroxyalkylene R⁵ is for example ethylene, 1-methylethylene, propylene, 2-ethylpropylene or 2-ethyl-2-hydroxymethylpropylene

C₄-C₂₂Acyloxyalkylene R⁵ is for example 2-ethyl-2-acetoxymethylpropylene

Examples of polyalkylpiperidine compounds in this class are the following compounds

- 50) 9-aza-8,8,10,10-tetramethyl-1,5-dioxaspiro[5,5]undecane
 51) 9-aza-8,8,10,10-tetramethyl-3-ethyl-1,5-dioxaspiro[5,5]undecane
 52) 8-aza-2,7,7,9,9-hexamethyl-1,4-dioxaspiro[4,5]decane
 53) 9-aza-3-hydroxymethyl-3-ethyl-8,9,10,10-pentamethyl-1,5-dioxaspiro[5,5]undecane
 54) 9-aza-3-ethyl-3-acetoxymethyl-9-acetyl-8,8,10,10-tetramethyl-1,5-dioxaspiro[5,5]undecane
 55) 2,2,6,6-tetramethylpiperidine-4-spiro-2'-(1',3'-dioxane)-5'-spiro-5''-(1'',3''-dioxane)-2'''-spiro-4'''-(2'''',2'''',6'''',6'''',tetramethylpiperidine)

d. Compounds of the formulae VA, VB and VC

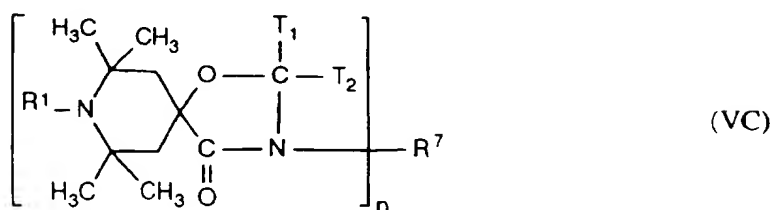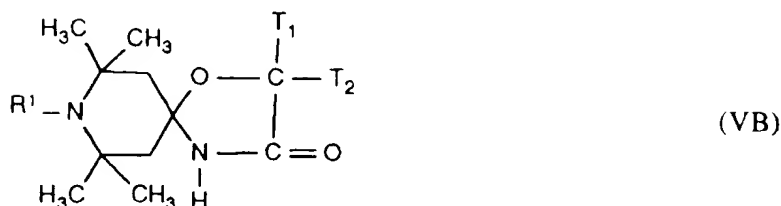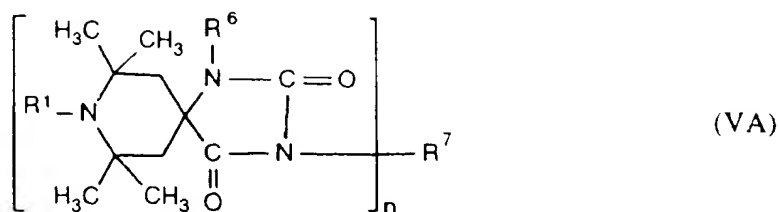

in which

n is the number 1 or 2

R^1 is as defined under a)

R^6 is hydrogen, C_1 - C_{12} alkyl, allyl, benzyl, glycidyl or C_2 - C_6 alkoxyalkyl and

R^7 , if n is 1, is hydrogen, C_1 - C_{12} alkyl, C_3 - C_5 alkenyl, C_7 - C_9 aralkyl, C_5 - C_7 cycloalkyl

C_2 - C_4 hydroxyalkyl, C_2 - C_6 alkoxyalkyl, C_6 - C_{10} aryl, glycidyl or a group of the formula $-(\text{CH}_2)_p\text{-COO-Q}$ or of the formula $-(\text{CH}_2)_p\text{-O-CO-Q}$, in which p is 1 or 2 and Q is C_1 - C_4 alkyl or phenyl.

if n is 2, R^7 is C_2 - C_{12} alkylene, C_4 - C_{12} alkenylene, C_6 - C_{12} arylene, a $-\text{CH}_2\text{-CH(OH)-CH}_2\text{-O-D-O-CH}_2\text{-CH(OH)-CH}_2\text{-}$ group, in which D is C_2 - C_{10} alkylene, C_6 - C_{15} arylene, C_6 - C_{12} cycloalkylene or a $-\text{CH}_2\text{CH(OZ')CH}_2\text{-(OCH}_2\text{-CH(OZ'))CH}_2\text{)}_2\text{-}$ group.

in which Z' is hydrogen, C_1 - C_{16} alkyl, allyl, benzyl, C_2 - C_{12} alkanoyl or benzoyl.

T_1 and T_2 , independently of one another, are hydrogen, C_1 - C_{16} alkyl or unsubstituted or halogen- or C_1 - C_4 alkyl-substituted C_6 - C_{10} aryl or C_7 - C_9 aralkyl, or

T_1 and T_2 , together with the carbon atom bonding them, form a C_5 - C_{12} cycloalkane ring

Any C_1 - C_{12} alkyl substituents are, for example, methyl, ethyl, n -propyl, n -butyl, sec-butyl, tert-butyl, n -hexyl, n -octyl, 2-ethylhexyl, n -nonyl, n -decyl, n -undecyl or n -dodecyl

Any C_1 - C_{16} alkyl substituents can be, for example, the groups mentioned above and in addition, for example, n -tridecyl, n -tetradecyl, n -hexadecyl or n -octadecyl.

Any C_2 - C_6 alkoxyalkyl substituents are, for example, methoxymethyl, ethoxymethyl, propoxymethyl, tert-butoxymethyl, ethoxyethyl, ethoxypropyl, n -butoxyethyl, tert-butoxyethyl, isopropoxyethyl or propoxypropyl.

C_3 - C_5 alkenyl R^7 is, for example, 1-propenyl, allyl, methallyl, 2-butenyl or 2-pentenyl.

C_7 - C_9 aralkyl R^7 , T_1 and T_2 are, in particular, phenethyl or especially benzyl. If T_1 and T_2 , together with the carbon atom, form a cycloalkane ring, this can be, for example, a cyclopentane, cyclohexane, cyclooctane or cyclododecane ring.

C_2 - C_4 hydroxyalkyl R^7 is, for example, 2-hydroxyethyl, 2-hydroxypropyl, 2-hydroxybutyl or 4-hydroxybutyl

C_6 - C_{10} aryl R^7 , T_1 and T_2 are, in particular, phenyl, α - or β -naphthyl, which are unsubstituted or substituted by

halogen or C₁-C₄alkyl

C₂-C₁₂alkylene R¹ is, for example, ethylene, propylene, 2,2-dimethylpropylene, tetramethylenylene, hexamethylenylene, octamethylenylene, decamethylenylene or dodecamethylenylene

C₃-C₁₂alkenylenylene R¹ is, in particular, 2-butenylenylene, 2-pentenylene or 3-hexenylenylene

C₆-C₁₂arylene R¹ is, for example, *o*-, *m*- or *p*-phenylene, 1,4-naphthylene or 4,4'-biphenylene





C₃-C₁₂alkanyloyl Z¹ is, for example, propionyl, butyryl, octanoyl, dodecanoyl, preferably acetyl

C₃-C₁₂alkylene, C₆-C₁₂arylene or C₆-C₁₂cycloalkylene D is defined as under b


Examples of polyalkylpiperidine compounds from this class are the following compounds

- 56) 3-benzyl-1,3,8-triaza-7,7,9,9-tetramethylspiro[4.5]decane-2,4-dione
 57) 3-*n*-octyl-1,3,8-triaza-7,7,9,9-tetramethylspiro[4.5]decane-2,4-dione
 58) 3-allyl-1,3,8-triaza-7,7,9,9-pentamethylspiro[4.5]decane-2,4-dione
 59) 3-glycidyl-1,3,8-triaza-7,7,8,9,9-pentamethylspiro[4.5]decane-2,4-dione
 60) 1,3,7,7,8,9,9-heptamethyl-1,3,8-triazaspiro[4.5]decane-2,4-dione
 61) 2-isopropyl-7,7,9,9-tetramethyl-1-oxa-3,8-diaza-4-oxospiro[4.5]decane
 62) 2,2-dibutyl-7,7,9,9-tetramethyl-1-oxa-3,8-diaza-4-oxospiro[4.5]decane
 63) 2,2,4,4-tetramethyl-7-oxa-3,20-diaza-21-oxodispiro[5.11.2]-heneicosane
 64) 2-butyl-7,7,9,9-tetramethyl-1-oxa-4,8-diaza-3-oxospiro[4.5]decane
 65) 8-acetyl-3-dodecyl-1,3,8-triaza-7,7,9,9-tetramethylspiro[4.5]decane-2,4-dione


or the compounds of the following formulae

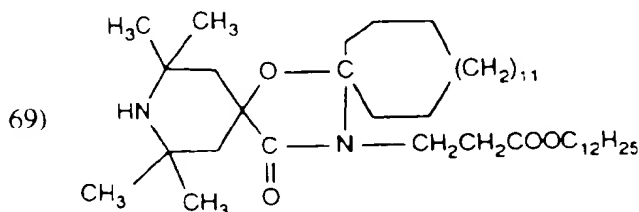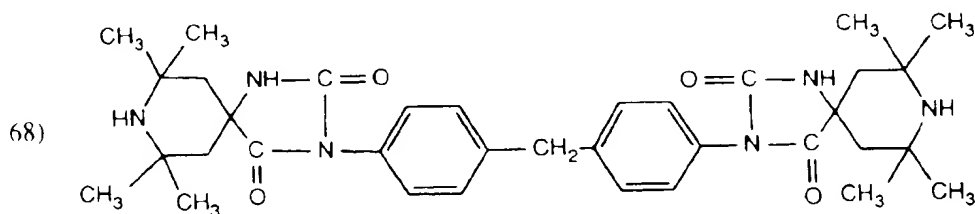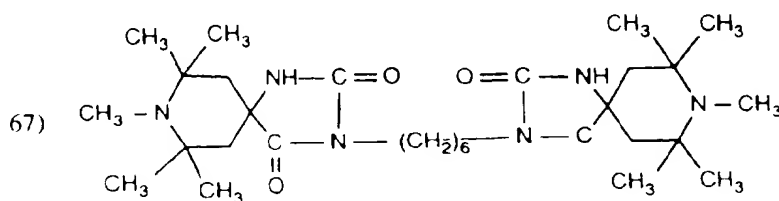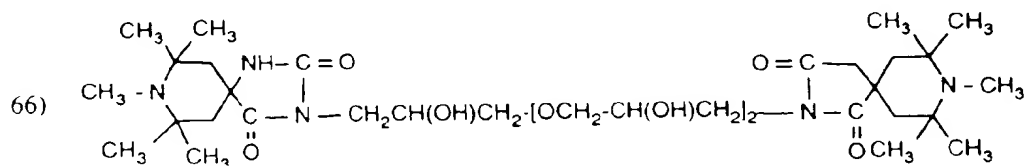

e) Compounds of the formula VI

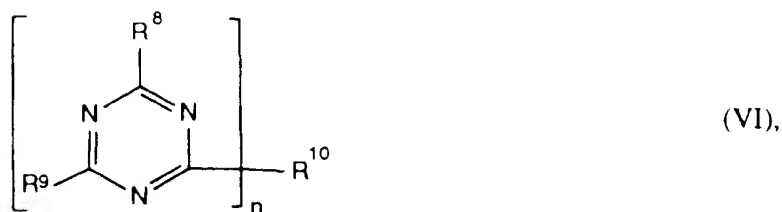

in which
n is the number 1 or 2 and R⁸ is a group of the formula



in which R¹ is as defined under a).

E is -O- or -NR¹¹.


A is C₂-C₆alkylene or -(CH₂)₃-O- and

x is the numbers [sic] 0 or 1.

R⁹ is identical to R⁸ or is one of the groups -NR¹¹R¹², -OR¹³, -NHCH₂OR¹³ and -N(CH₂OR¹³)₂

R¹⁰, if n = 1, is identical to R⁸ or R⁹ and if n = 2, is a -E-B-E- group, in which B is C₂-C₆alkylene which is uninterrupted or interrupted by -N(R¹¹)-.


R¹¹ is C₁-C₁₂alkyl, cyclohexyl, benzyl or C₁-C₄hydroxyalkyl or a group of the formula




R¹² is C₁-C₁₂alkyl, cyclohexyl, benzyl or C₁-C₄hydroxyalkyl, and

R¹³ is hydrogen, C₁-C₁₂alkyl or phenyl, or

R¹¹ and R¹² together are C₄-C₅alkylene or -oxaalkylene, for example



or alternatively R¹¹ and R¹² are in each case a group of the formula

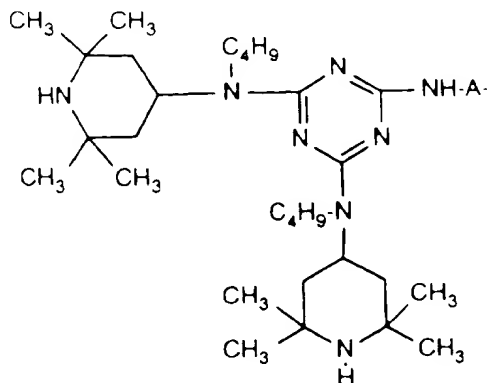

Any C_1 - C_{12} alkyl substituents are for example methyl ethyl n-propyl n-butyl sec-butyl tert-butyl n-hexyl n-octyl 2-ethylhexyl n-nonyl n-decyl n-undecyl or n-dodecyl


Any C_1 - C_4 hydroxyalkyl substituents are for example 2-hydroxyethyl 2-hydroxypropyl 3-hydroxypropyl 2-hydroxybutyl or 4-hydroxybutyl

C_2 - C_6 alkylene A is for example ethylene propylene 2,2-dimethylpropylene tetramethylene or hexamethylene


R^{11} and R^{12} together as C_4 - C_6 alkylene or -oxaalkylene are for example tetramethylene pentamethylene or 3-oxapentamethylene

Examples of polyalkylpiperidine compounds from this class are the compounds of the following formulae


70)

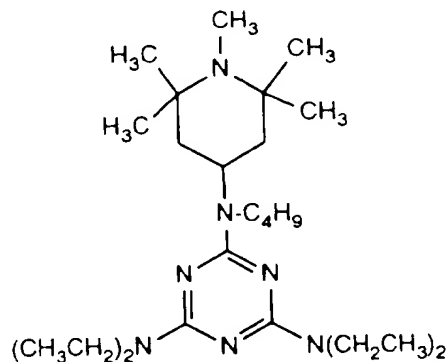


71)

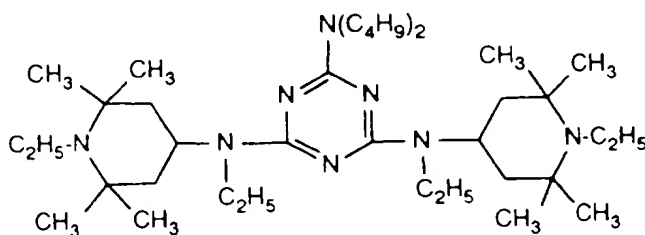



72)

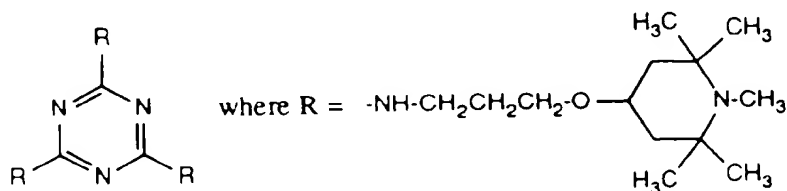



73)

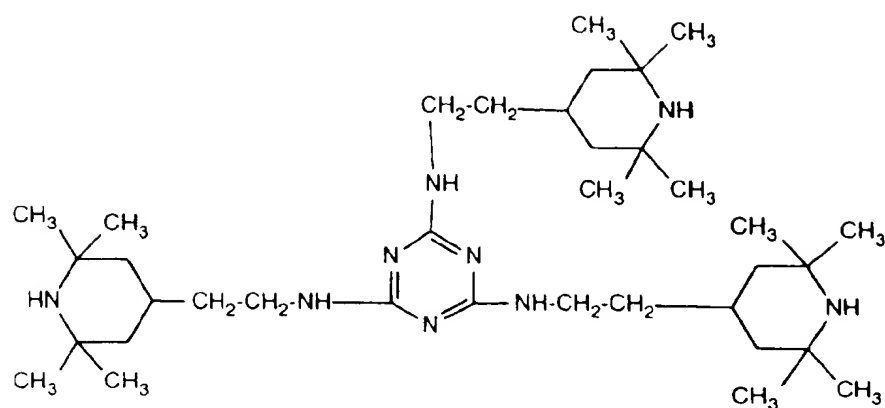


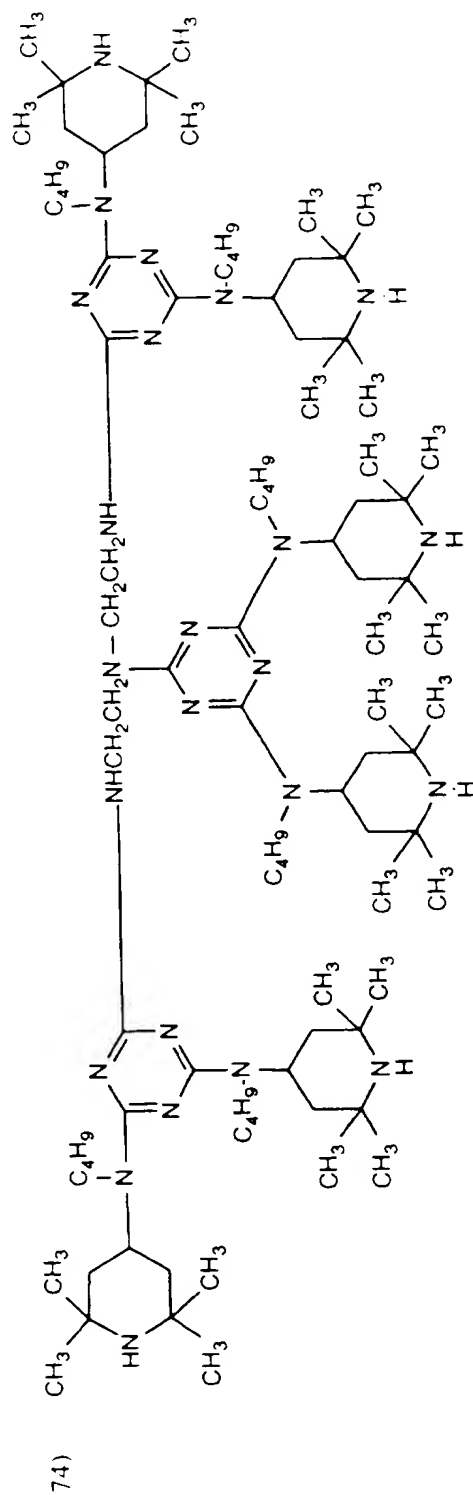





where R =

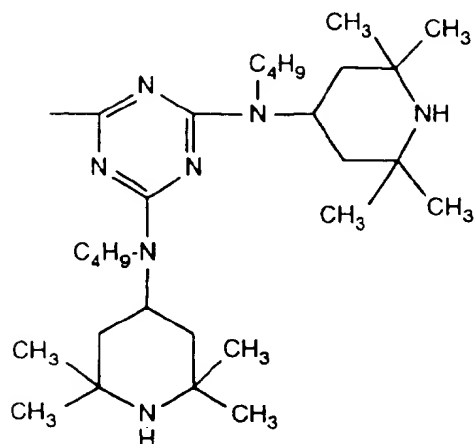


where R =

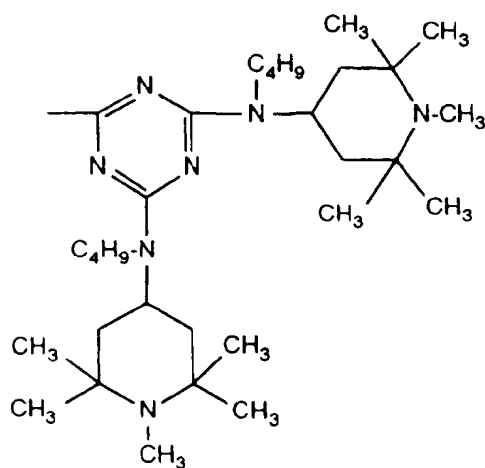


where R =

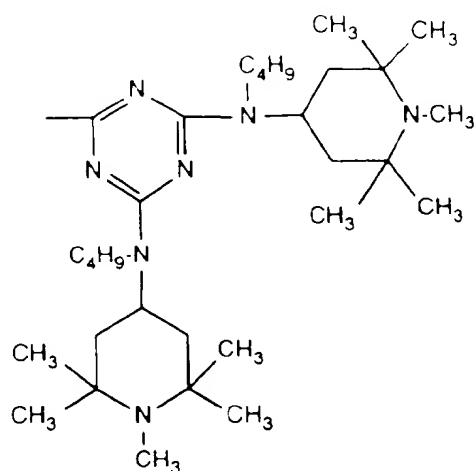


78)

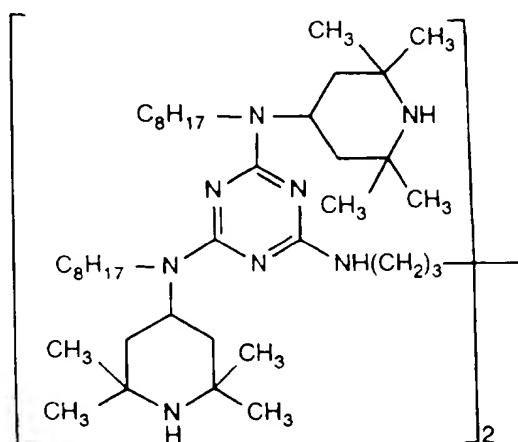

79)

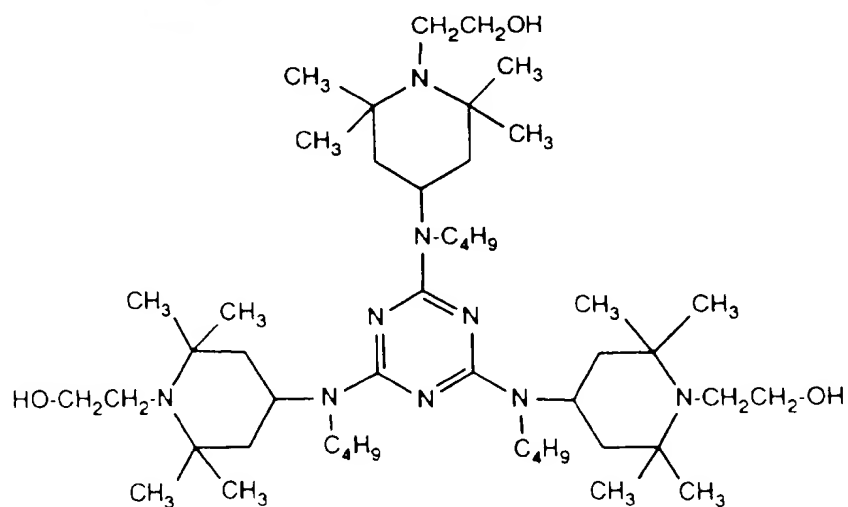


80)

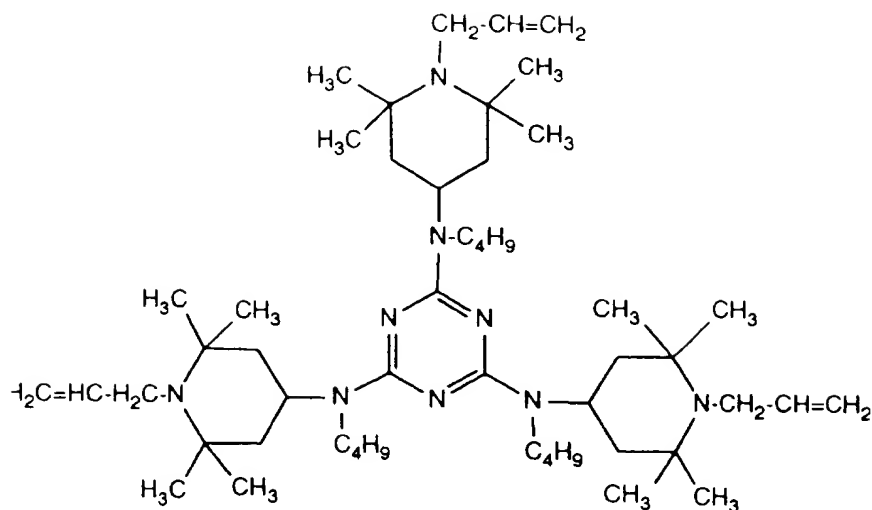


f) Oligomeric or polymeric compounds whose recurring structural unit contains one or more 2,2,6,6-tetraalkylpiperidine radicals of the formula (I), in particular polyesters, polyethers, polyamides, polyamines, polyurethanes, polyureas, polyaminotriazines, poly(meth)acrylates, polysiloxanes, poly(meth)acrylamides and copolymers thereof containing such radicals.

Examples of 2,2,6,6-polyalkylpiperidine light stabilizers from this class are the compounds of the following formulae, where m is a number from 2 to about 200.


81)

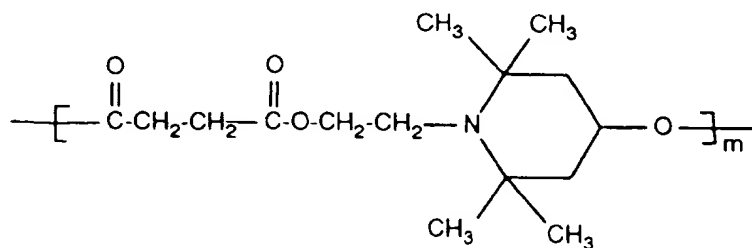


82)

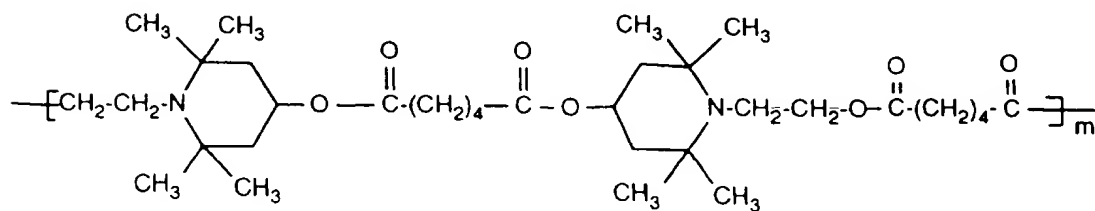


83)

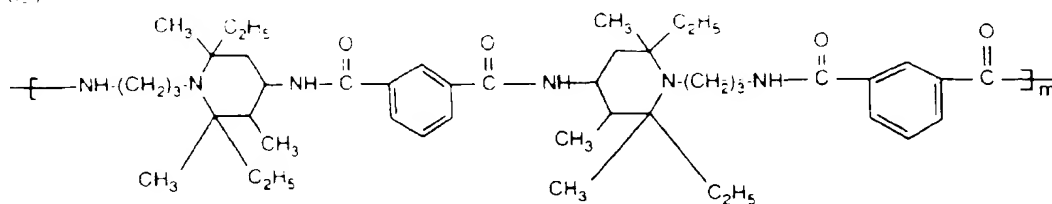


84)

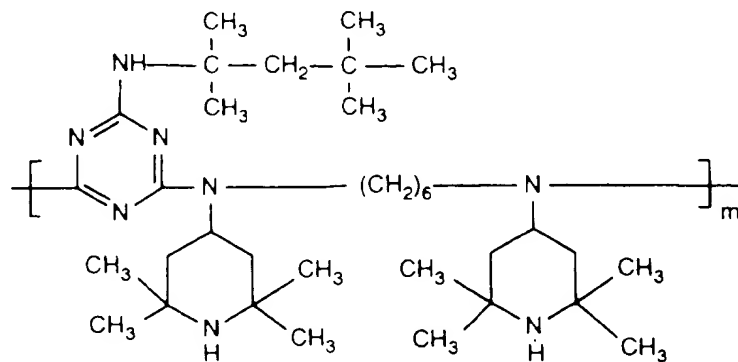


85)

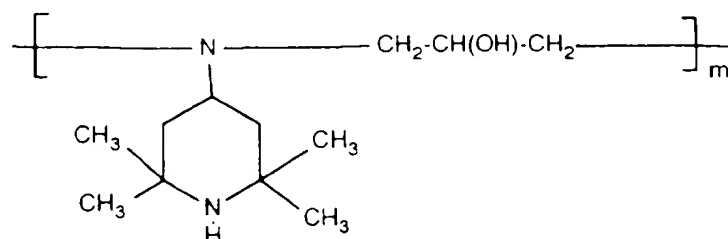


86)

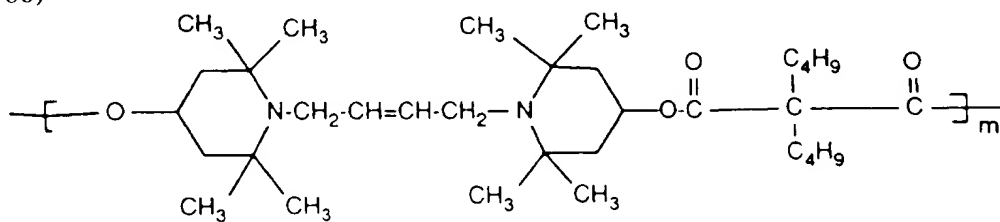


87)

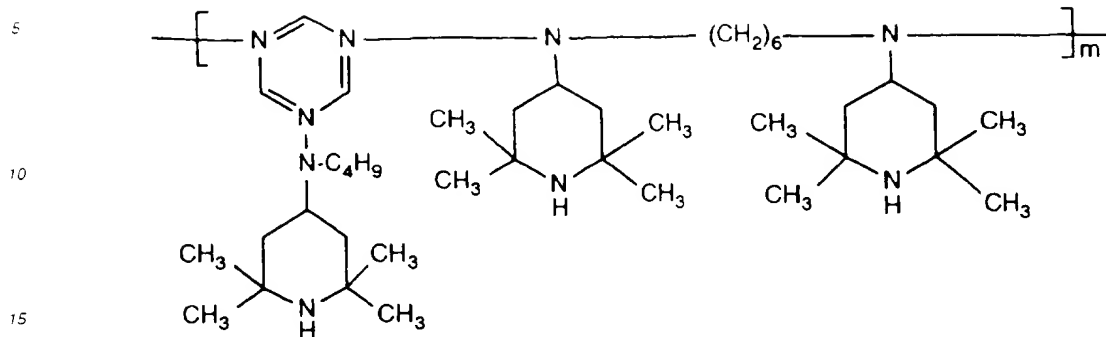


88)

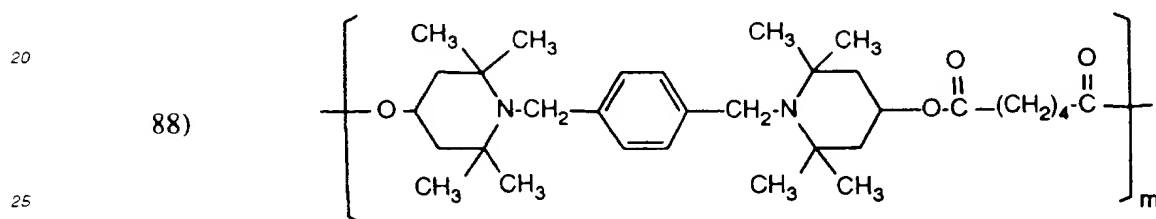

89)

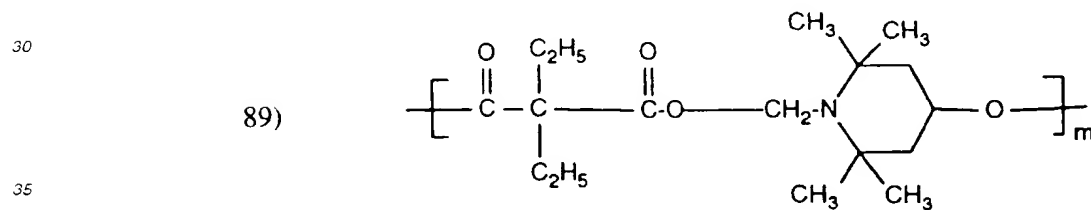


90)

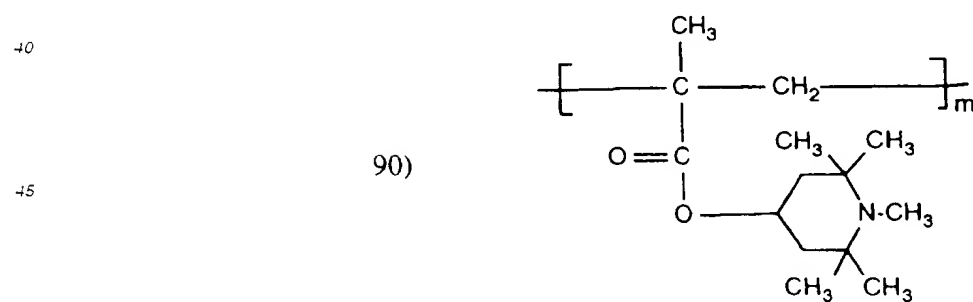





95)

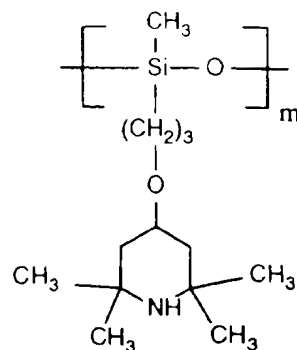


96)

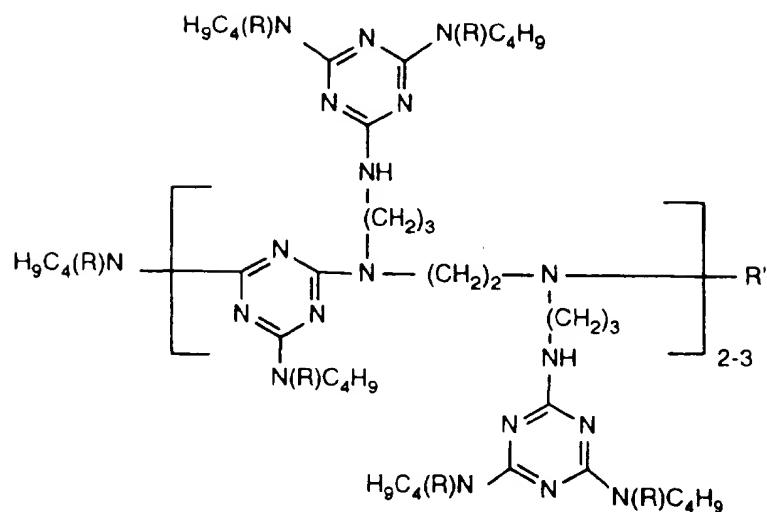

where



and

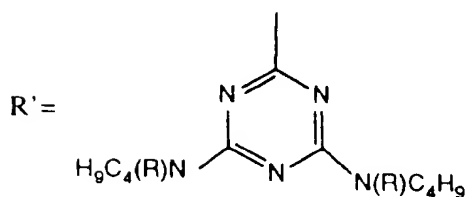


or H

Of these classes, classes e) and f) are particularly suitable, in particular the tetraalkylpiperidine compounds containing s-triazine groups. Compounds 74, 76, 84, 87, 92 and 95 are furthermore particularly suitable.

The amount of sterically hindered amine, preferably the tetramethylpiperidine compound, depends on the intended use of the plastic additive granules: the granules expediently comprise 0-90 % by weight, preferably 20-70 % by weight.


of sterically hindered amine

The antioxidants of the sterically hindered phenol type are generally known as antioxidants for organic materials and are frequently used for the stabilization of polymers. These compounds preferably contain at least one group of the formula (X)



in which R' is hydrogen, methyl or tert-butyl and R'' is unsubstituted or substituted alkyl or substituted alkylthioalkyl

Particular preference is given to compounds containing at least one group of the formula



in which R' is methyl or tert-butyl and R'' is unsubstituted or substituted alkyl or substituted alkylthioalkyl

Examples of such phenol antioxidants are

1. Alkylated monophenols for example 2,6-di-tert-butyl-4-methylphenol, 2-butyl-4,6-dimethylphenol, 2,6-di-tert-butyl-4-ethylphenol, 2,6-di-tert-butyl-4-n-butylphenol, 2,6-di-tert-butyl-4-isobutylphenol, 2,6-dicyclopentyl-4-methylphenol, 2-(α -methylcyclohexyl)-4,6-dimethylphenol, 2,6-dioctadecyl-4-methylphenol, 2,4,6-tricyclohexylphenol, 2,6-di-tert-butyl-4-methoxymethylphenol, 2,6-dinonyl-4-methylphenol, 2,4-dimethyl-6-(1'-methylundec-1'-yl)phenol, 2,4-dimethyl-6-(1'-methylheptadec-1'-yl)phenol, 2,4-dimethyl-6-(1'-methyltridec-1'-yl)phenol and mixtures thereof

2. Alkylthiomethylphenols for example 2,4-dioctylthiomethyl-6-tert-butylphenol, 2,4-dioctylthiomethyl-6-methylphenol, 2,4-dioctylthiomethyl-6-ethylphenol, 2,6-didodecylthiomethyl-4-nonylphenol

3. Hydroquinones and alkylated hydroquinones for example 2,6-di-tert-butyl-4-methoxyphenol, 2,5-di-tert-butylhydroquinone, 2,5-di-tert-amylhydroquinone, 2,6-diphenyl-4-octadecyloxyphenol, 2,6-di-tert-butylhydroquinone, 2,5-di-tert-butyl-4-hydroxyanisole, 3,5-di-tert-butyl-4-hydroxyanisole, 3,5-di-tert-butyl-4-hydroxyphenyl stearate, bis(3,5-di-tert-butyl-4-hydroxyphenyl) adipate

4. Tocopherols for example α -tocopherol, β -tocopherol, γ -tocopherol, δ -tocopherol and mixtures thereof (vitamin E)

5. Hydroxylated thiodiphenyl ether for example 2,2'-thiobis(6-tert-butyl-4-methylphenol), 2,2'-thiobis(4-octylphenol), 4,4'-thiobis(6-tert-butyl-3-methylphenol), 4,4'-thiobis(6-tert-butyl-2-methylphenol), 4,4'-thiobis(3,6-di-sec-amylphenol), 4,4'-bis(2,6-dimethyl-4-hydroxyphenyl) disulfide

6. Alkylidene bisphenols for example 2,2'-methylenebis(6-tert-butyl-4-methylphenol), 2,2'-methylenebis(6-tert-butyl-4-ethylphenol), 2,2'-methylenebis[4-methyl-6-(α -methylcyclohexyl)phenol], 2,2'-methylenebis(4-methyl-6-cyclohexylphenol), 2,2'-methylene-bis(6-nonyl-4-methylphenol), 2,2'-methylenebis(4,6-di-tert-butylphenol), 2,2'-ethylenedis(4,6-di-tert-butylphenol), 2,2'-ethylenedis(6-tert-butyl-4-isobutylphenol), 2,2'-methylenebis[6-(α -methylbenzyl)-4-nonylphenol], 2,2'-methylenebis[6-(α -dimethylbenzyl)-4-nonylphenol], 4,4'-methylenebis(2,6-di-tert-butylphenol), 4,4'-methylenebis(6-tert-butyl-2-methylphenol), 1,1-bis(5-tert-butyl-4-hydroxy-2-methylphenyl)butane, 2,6-bis(3-tert-butyl-5-methyl-2-hydroxybenzyl)-4-methylphenol, 1,1,3-tris(5-tert-butyl-4-hydroxy-2-methylphenyl)butane, 1,1-bis(5-tert-butyl-4-hydroxy-2-methylphenyl)-3-n-dodecylmercaptobutane, ethylene glycol bis[3,3-bis(3'-tert-butyl-4'-hydroxyphenyl) butyrate], bis[3-tert-butyl-4-hydroxy-5-methylphenyl]dicyclopentadiene, bis[2-(3'-tert-butyl-2'-hydroxy-5'-methylbenzyl)-6-tert-butyl-4-methylphenyl] terephthalate, 1,1-bis[3,5-dimethyl-2-hydroxyphenyl]butane, 2,2-bis[3,5-di-tert-butyl-4-hydroxy-phenyl]propane, 2,2-bis(5-tert-butyl-4-hydroxy-2-methylphenyl)-4-n-dodecylmercaptobutane, 1,1,5,5-tetra-(5-tert-butyl-4-hydroxy-2-methylphenyl)pentane

7. O-, N- and S-benzyl compounds for example 3,5,3',5'-tetra-tert-butyl-4,4'-dihydroxydibenzyl ether, octadecyl

4-hydroxy-3,5-dimethylbenzylmercaptoacetate tris(3,5-di-tert-butyl-4-hydroxybenzyl)amine bis(4-tert-butyl-3-hydroxy-2,6-dimethylbenzyl) dithioterephthalate bis(3,5-di-tert-butyl-4-hydroxybenzyl) sulfide isooctyl 3,5-di-tert-butyl-4-hydroxybenzylmercaptoacetate

8. Hydroxybenzylated malonates for example dioctadecyl 2,2-bis(3,5-di-tert-butyl-2-hydroxybenzyl)malonate di-octadecyl 2-(3-tert-butyl-4-hydroxy-5-methylbenzyl)malonate didodecylmercaptoethyl 2,2-bis(3,5-di-tert-butyl-4-hydroxybenzyl)malonate di-[4-(1,1,3,3-tetramethylbutyl)phenyl] 2,2-bis(3,5-di-tert-butyl-4-hydroxybenzyl)malonate

9. Hydroxybenzyl aromatic compounds for example 1,3,5-tris(3,5-di-tert-butyl-4-hydroxybenzyl)-2,4,6-trimethylbenzene 1,4-bis(3,5-di-tert-butyl-4-hydroxybenzyl)-2,3,5,6-tetramethylbenzene 2,4,6-tris-(3,5-di-tert-butyl-4-hydroxybenzyl)phenol

10. Triazine compounds for example 2,4-bis(octylmercapto-6-(3,5-di-tert-butyl-4-hydroxyanilino)-1,3,5-triazine 2-octylmercapto-4,6-bis(3,5-di-tert-butyl-4-hydroxyanilino)-1,3,5-triazine 2-octylmercapto-4,6-bis(3,5-di-tert-butyl-4-hydroxyphenoxy)-1,3,5-triazine 2,4,6-tris(3,5-di-tert-butyl-4-hydroxyphenoxy)-1,2,3-triazine 1,3,5-tris(3,5-di-tert-butyl-4-hydroxybenzyl)isocyanurate 1,3,5-tris(4-tert-butyl-3-hydroxy-2,6-dimethylbenzyl)isocyanurate 2,4,6-tris(3,5-di-tert-butyl-4-hydroxyphenylethyl)-1,3,5-triazine 1,3,5-tris(3,5-di-tert-butyl-4-hydroxyphenylpropionyl)hexahydro-1,3,5-triazine 1,3,5-tris(3,5-dicyclohexyl-4-hydroxybenzyl)-isocyanurate

11. Benzylphosphonates for example dimethyl 2,5-di-tert-butyl-4-hydroxybenzylphosphonate diethyl 3,5-di-tert-butyl-4-hydroxybenzylphosphonate dioctadecyl 3,5-di-tert-butyl-4-hydroxybenzylphosphonate dioctadecyl 5-tert-butyl-4-hydroxy-3-methylbenzylphosphonate calcium salt of monoethyl 3,5-di-tert-butyl-4-hydroxybenzylphosphonate

12. Acylaminophenols for example 4-hydroxylauranilide 4-hydroxystearanilide octyl N-(3,5-di-tert-butyl-4-hydroxyphenyl)carbamate

13. Esters of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid with monohydric or polyhydric alcohols for example with methanol ethanol octanol octadecanol 1,6-hexanediol 1,9-nonanediol ethylene glycol 1,2-propanediol neopentyl glycol thiodiethylene glycol diethylene glycol triethylene glycol pentaerythritol tris(hydroxyethyl) isocyanurate N,N'-bis(hydroxyethyl)oxalamide 3-thiaundecanol 3-thiapentadecanol trimethylhexanediol trimethylolpropane 4-hydroxymethyl-1-phospha-2,6,7-trioxabicyclo-[2,2,2]octane

14. Esters of β -(5-tert-butyl-4-hydroxy-3-methylphenyl)propionic acid with monohydric or polyhydric alcohols for example methanol ethanol octanol octadecanol 1,6-hexanediol 1,9-nonanediol ethylene glycol 1,2-propanediol neopentyl glycol thiodiethylene glycol diethylene glycol triethylene glycol pentaerythritol tris(hydroxyethyl) isocyanurate N,N'-bis(hydroxyethyl)oxalamide 3-thiaundecanol 3-thiapentadecanol trimethylhexanediol trimethylolpropane 4-hydroxymethyl-1-phospha-2,6,7-trioxabicyclo-[2,2,2]octane


15. Esters of β -(3,5-dicyclohexyl-4-hydroxyphenyl)propionic acid with monohydric or polyhydric alcohols for example methanol ethanol octanol octadecanol 1,6-hexanediol 1,9-nonanediol ethylene glycol 1,2-propanediol neopentyl glycol thiodiethylene glycol diethylene glycol triethylene glycol pentaerythritol tris(hydroxyethyl) isocyanurate N,N'-bis(hydroxyethyl)oxalamide 3-thiaundecanol 3-thiapentadecanol trimethylhexanediol trimethylolpropane 4-hydroxymethyl-1-phospha-2,6,7-trioxabicyclo-[2,2,2]octane

16. Esters of 3,5-di-tert-butyl-4-hydroxyphenylacetic acid with monohydric or polyhydric alcohols for example methanol ethanol octanol octadecanol 1,6-hexanediol 1,9-nonanediol ethylene glycol 1,2-propanediol neopentyl glycol thiodiethylene glycol diethylene glycol triethylene glycol pentaerythritol tris(hydroxyethyl) isocyanurate N,N'-bis(hydroxyethyl)oxalamide 3-thiaundecanol 3-thiapentadecanol trimethylhexanediol trimethylolpropane 4-hydroxymethyl-1-phospha-2,6,7-trioxabicyclo-[2,2,2]octane


17. Amides of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid for example N,N'-bis(3,5-di-tert-butyl-4-hydroxyphenylpropionyl)hexamethylenediamine N,N'-bis(3,5-di-tert-butyl-4-hydroxyphenylpropionyl)trimethylenediamine N,N'-bis(3,5-di-tert-butyl-4-hydroxyphenylpropionyl)hydrazine

Preference is given to the antioxidants mentioned above under points 7, 9, 10, 13, 14, 15 and 17, in particular points 7, 9, 10 and 13, especially the octanol and octadecanol ester of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid and tetrakis[3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionyloxymethyl]methane. Most preference is given to tetrakis[3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionyloxymethyl]methane


Other particularly preferred compounds are

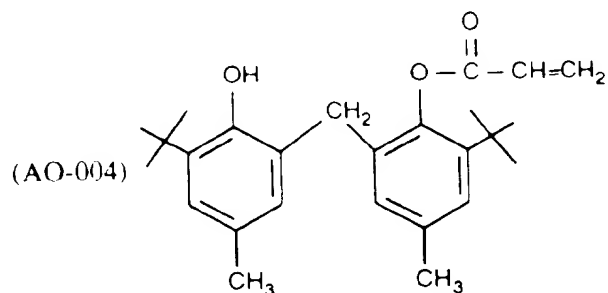


{2-(1,1-dimethylethyl)-6-[[3-(1,1-dimethylethyl)-2-hydroxy-5-methylphenyl]methyl]-4-methylphenyl 2-propenoate}

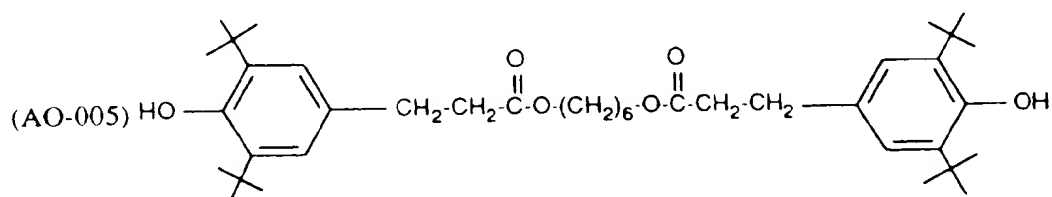


{1,6-hexanediyl 3,5-bis(1,1-dimethylethyl)-4-hydroxyphenylpropanoate}

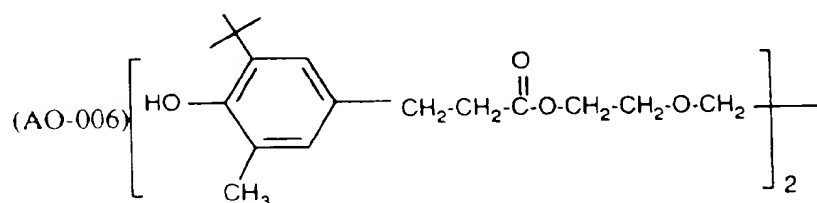


{1,2-ethanediylbis(oxy-2,1-ethanediyl) 3-(1,1-dimethylethyl)-4-hydroxy-5-methyl-phenylpropanoate}

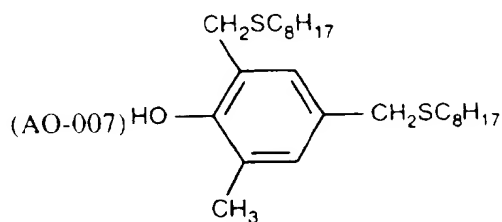


{2-methyl-4,6-di[(octylthio)methyl]phenol}

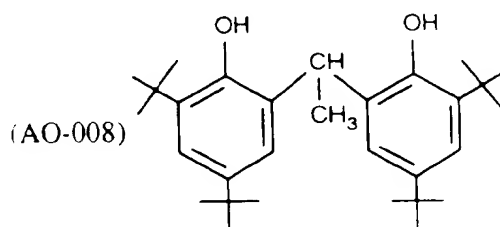


{2,2'-ethyldenebis(4,6-di-tert-butylphenol)}

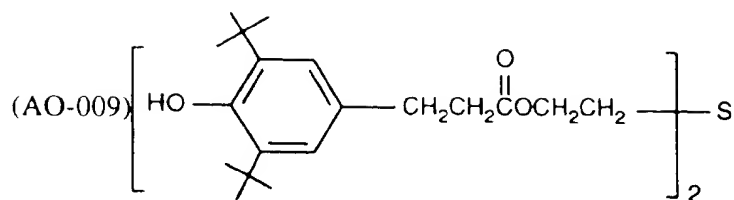

{thiodi-2,2'-ethanediyl bis-3,3'-di(1,1-dimethylethyl)-4-hydroxyphenylpropanoate}

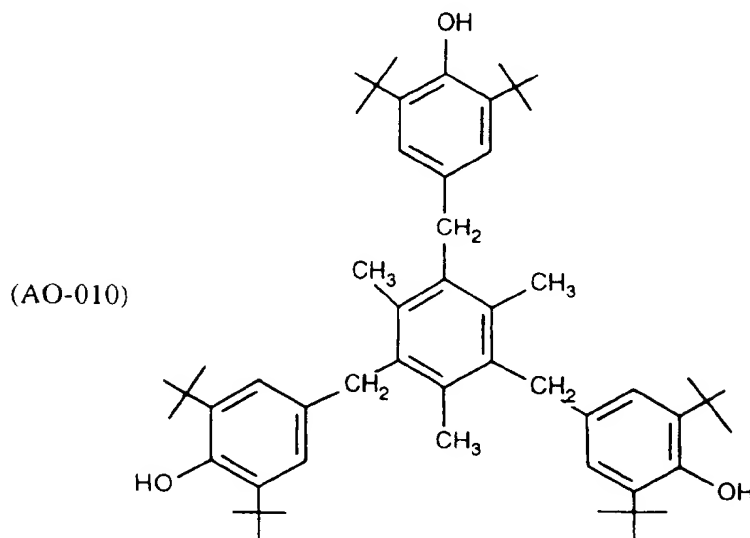

{4,4'-[2,2'-(2,4,6-trimethyl-1,3,5-phenyltriyl)]tris(methylene)]tris[2,6-bis(1,1-dimethylethyl)phenol]}

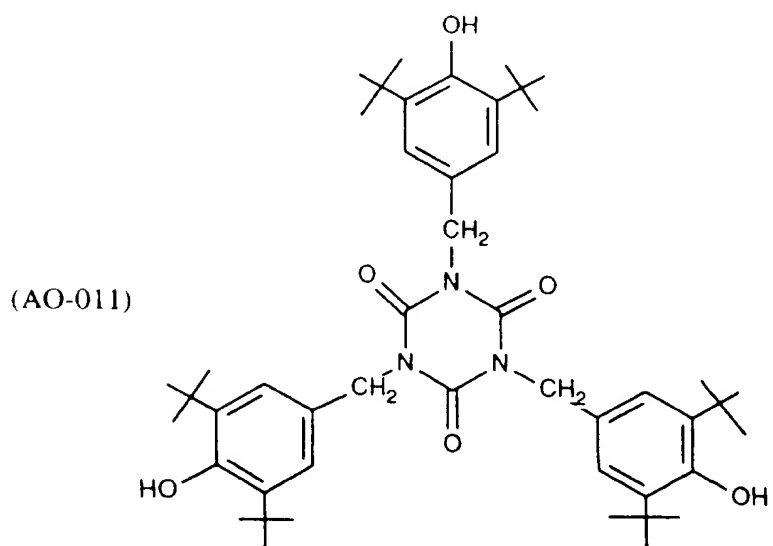

{1,3,5-tris[[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]methyl]-1,3,5-triazine-2,4,6(1H,3H,5H)-trione}





The amount of the antioxidants of the sterically hindered phenol type depends on the intended use of the plastic additive granules: the granules expediently contain 0-90 % by weight, preferably 3-60 % by weight, of antioxidant of the sterically hindered phenol type





Organic phosphites and phosphonites are likewise known as stabilizers for plastics. They are used in particular

as process and stabilizers for polyolefins.

They are predominantly aromatic phosphites and phosphonites, for example triphenyl phosphite, diphenyl alkyl phosphites, phenyl dialkyl phosphites, tris(diphenyl alkyl) phosphite, amines, tris(hydroxyphenyl) phosphite, tri(alkyl phosphite), tri(octadecyl phosphite), distearyl pentaerythrityl diphosphite, tris(2,4-di-tert-butylphenyl) phosphite, distearyl pentaerythrityl diphosphite, bis(2,4-di-tert-butylphenyl) pentaerythrityl diphosphite, tris(stearyl sorbitol triphosphite), tetrakis(2,4-di-tert-butylphenyl)-4,4'-biphenylene diphosphonite, 3,9-bis(2,4-di-tert-butyl-4-methylphenoxy)-2,4,8,10-tetraoxa-3,9-diphosphaspiro[5,5]undecane, 3,9-tris(2,4,6-tris-tert-butylphenoxy)-2,4,8,10-tetraoxa-3,9-diphosphaspiro[5,5]undecane and 2,2'-ethylenedi-bis(4,6-di-tert-butylphenyl) fluorophosphite.

Particular preference is given to the following phosphites: (P-001) tris(2,4-di-tert-butylphenyl) phosphite

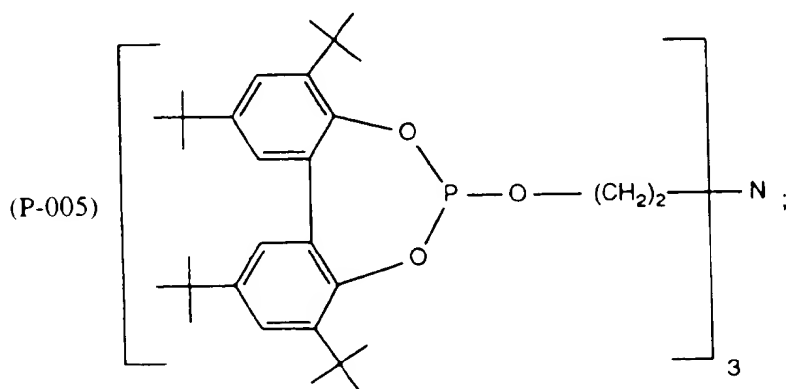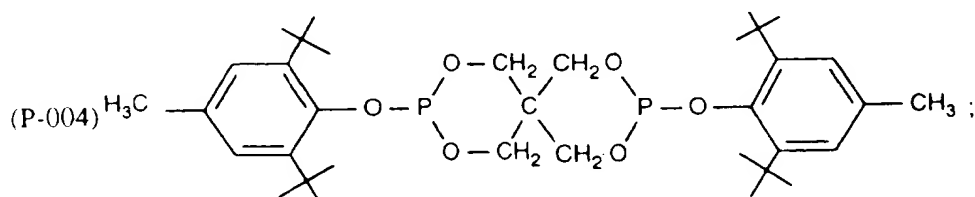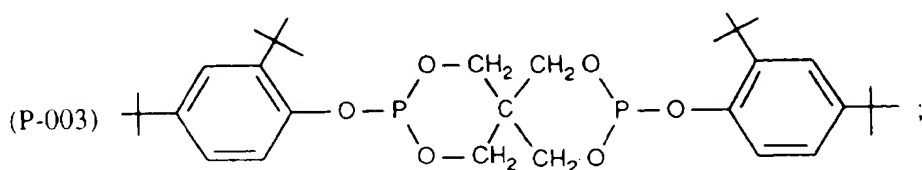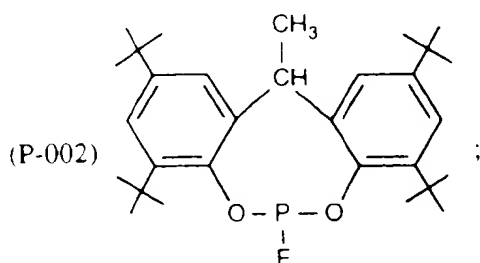

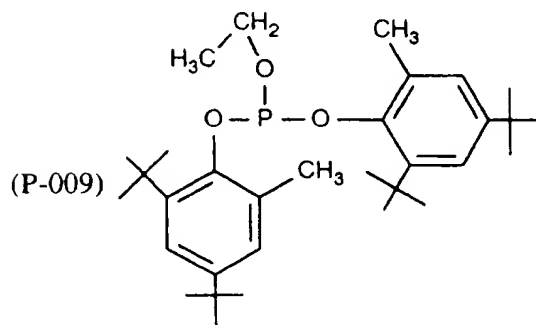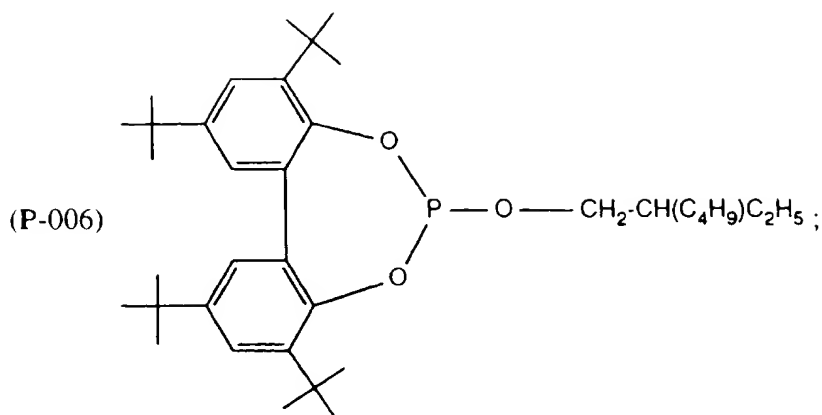


Very particular preference is given to tris(2,4-di-tert-butylphenyl) phosphite.

The amount of phosphites or phosphonites depends on the intended use of the plastic additive granules: the granules expediently contain 0-90 % by weight, preferably 3-70 % by weight, of phosphite or phosphonite.

Besides a sterically hindered phenol, the additive granules preferably also contain an organic phosphite or phosphonite. Preferred are combinations of a preferred sterically hindered phenol and a preferred organic phosphite or phosphonite, as indicated above; for example, the combination of the octanol or octadecanol of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid or tetrakis[3-(3,5-di-tert-butyl-hydroxyphenyl)propionyloxymethyl]methane with tris(2,4-di-tert-butylphenyl) phosphite. Most preferred is the combination of tetrakis[3-(3,5-di-tert-butyl-hydroxyphenyl)propionyloxymethyl]methane and tris(2,4-di-tert-butylphenyl) phosphite. The weight ratio between sterically hindered phenol and phosphite or phosphonite is preferably from 20:1 to 1:20, particularly preferably from 10:1 to 1:10, and very particularly preferably from 4:1 to 1:4.

Compounds from the series consisting of the hydrotalcites, metal carbonates and metal oxides which can be used

According to the invention are both naturally occurring minerals and synthetic compounds.
Compounds from the hydrotalcite series can be represented by the general formula (X)



where

M^{2+} = Mg^{2+} , Ca^{2+} , Sr^{2+} , Ba^{2+} , Zn^{2+} , Cd^{2+} , Pb^{2+} , Sn^{2+} and/or Ni^{2+}

M^{3+} = Al^{3+} , B^{3+} or Bi^{3+}

A^n is an anion having the valency n

n is a number from 1 to 4

x is a number from 0 to 0.5 and

m is a number from 0 to 2

A^n is preferably OH^- , Cl^- , Br^- , I^- , ClO_4^- , HCO_3^- , CH_3COO^- , $C_6H_5COO^-$, CO_3^{2-} , SO_4^{2-}


$(COO^-)_2$, $(CHOHCOO^-)_2$, $(CHOH)_4CH_2OHCOO^-$, $C_2H_4(COO^-)_2$, $(CH_2COO^-)_2$, $CH_3CHOHCOO^-$, SiO_3^{2-} , SiO_4^{4-} , $Fe(CN)_6^{3-}$, $Fe(CN)_6^{4-}$ or HPO_4^{2-}

Other hydrotalcites which can expediently be employed in the process as described above are compounds of the general formula (Xa)



where in the present formula Xa M^{2+} is at least one metal from the series consisting of Mg and Zn, preferably Mg^{2+}

A^n is an anion, for example from the series consisting of CO_3^{2-} .








OH^- and S^{2-} where n is the valency of the anion, m is a positive number, preferably from 0.5 to 5 and x and z are positive numbers, where x is preferably from 2 to 6 and z is less than 2

Preferred and commercially available hydrotalcites are DHT-4A and DHT-4C from Kyowa company, Japan.
Preference is given to compounds from the hydrotalcite series of the general formula (X)



where M^{2+} is Mg^{2+} or a solid solution of Mg and Zn, A^n is CO_3^{2-} , x is a number from 0 to 0.5 and m is a number from 0 to 2

Very particular preference is given to hydrotalcites of the formulae



The amount of hydrotalcites depends on the intended use of the plastic additive granules, the granules expediently contain 0-50 % by weight, preferably 3-40 % by weight, of hydrotalcite

Preferred metal oxides are the oxides of divalent metals. Particular preference is given to the oxides of metals from the second main group or sub-group, very particular preference being given to zinc oxide and magnesium oxide

The amount of metal oxides depends on the intended use of the plastic additive granules, the granules expediently contain 0-90 % by weight, preferably 5-60 % by weight, of metal oxide

Preferred metal carbonates are the carbonates of divalent metals. Particular preference is given to the carbonates

of metals from the second main group or sub-group, very particular preference being given to calcium carbonate.

The amount of metal carbonates depends on the intended use of the plastic additive granules: the granules expediently contain 0-90 % by weight, preferably 5-60 % by weight, of metal carbonate.

A further metal soap for the purposes of this invention is a metal salt of a fatty acid (with the exception of calcium stearate) where the metal can be, in particular, an element from main group or sub-group II or tin.

These are in particular magnesium, tin or preferably zinc salts from the series consisting of aliphatic saturated C_2 - C_{22} carboxylates, aliphatic olefinic C_3 - C_{22} carboxylates, aliphatic C_2 - C_{22} carboxylates substituted by at least one OH group, cyclic or bicyclic C_5 - C_{22} carboxylates, aromatic C_7 - C_{22} carboxylates, aromatic C_7 - C_{22} carboxylates substituted by at least one OH group, C_1 - C_{16} alkyl-substituted phenylcarboxylates and phenyl- C_1 - C_{16} alkylcarboxylates, preference being given to stearates and laurates and behenates. The other metal soaps are very particularly preferably zinc stearate or magnesium stearate.

The amount of the other metal soap depends on the intended use of the plastic additive granules: the granules expediently contain 0-90 % by weight, preferably 5-60 % by weight, of a further metal soap.

Preferred thioesters are esters of β -thiodipropionic acid, for example the lauryl, stearyl, myristyl or tridecyl esters, mercaptobenzimidazole, the zinc salt of 2-mercaptobenzimidazole, zinc dibutyldithiocarbamate, dioctadecyl disulfide, pentaerythritol tetrakis(β -dodecylmercapto)propionate or ethylene glycol bismercaptoacetate.

Examples of suitable lubricants are: montan wax, fatty acid esters, PE waxes, amide waxes, chlorinated paraffins, glycerol esters or alkaline earth metal soaps. Suitable lubricants are also described in "Plastics Additives", editors H. Gächter and H. Müller, Hanser Verlag, 3rd Edition, 1990, pages 423-480.

The additive granules can furthermore contain compounds from classes 2-10 below.

2. UV absorbers and light stabilizers

2.1. 2-(2'-Hydroxyphenyl)benzotriazoles, for example 2-(2'-hydroxy-5'-methylphenyl)benzotriazole, 2-(3'-5'-di-tert-butyl-2'-hydroxyphenyl)benzotriazole, 2-(5'-tert-butyl-2'-hydroxyphenyl)benzotriazole, 2-(2'-hydroxy-5'-(1,1,3,3-tetramethylbutyl)phenyl)benzotriazole, 2-(3'-5'-di-tert-butyl-2'-hydroxyphenyl)-5-chlorobenzotriazole, 2-(3'-tert-butyl-2'-hydroxy-5'-methylphenyl)-5-chlorobenzotriazole, 2-(3'-sec-butyl-5'-tert-butyl-2'-hydroxyphenyl)benzotriazole, 2-(2'-hydroxy-4'-octoxyphenyl)benzotriazole, 2-(3'-5'-di-tert-amyl-2'-hydroxyphenyl)benzotriazole, 2-(3'-5'-bis(α , α -dimethylbenzyl)-2'-hydroxyphenyl)benzotriazole, mixture of 2-(3'-tert-butyl-2'-hydroxy-5'-(2-octyloxycarbonyl)phenyl)-5-chlorobenzotriazole, 2-(3'-tert-butyl-5'-[2-(2-ethylhexyloxy)carbonyl]phenyl)-2'-hydroxy-phenyl)-5-chlorobenzotriazole, 2-(3'-tert-butyl-2'-hydroxy-5'-(2-methoxycarbonyl)phenyl)-5-chlorobenzotriazole, 2-(3'-tert-butyl-2'-hydroxy-5'-(2-methoxycarbonyl)phenyl)benzotriazole, 2-(3'-tert-butyl-2'-hydroxy-5'-(2-octyloxycarbonyl)phenyl)benzotriazole, 2-(3'-tert-butyl-5'-[2-(2-ethylhexyloxy)carbonyl]phenyl)-2'-hydroxy-phenyl)benzotriazole, 2-(3'-dodecyl-2'-hydroxy-5'-methylphenyl)benzotriazole, and 2-(3'-tert-butyl-2'-hydroxy-5'-(2-isooctyloxycarbonyl)phenyl)benzotriazole. 2,2'-methylenebis[4-(1,1,3,3-tetramethylbutyl)-6-benzotriazol-2-yl phenol], transesterification product of 2-[3'-tert-butyl-5'-(2-methoxycarbonyl)phenyl]-2'-hydroxyphenyl)benzotriazole with polyethylene glycol 300, $[R-CH_2CH_2-COO(CH_2)_3]_n$ where $R = 3$ -tert-butyl-4'-hydroxy-5'-2H-benzotriazol-2-yl phenyl.

2.2. 2-Hydroxybenzophenones, for example the 4-hydroxy, 4-methoxy, 4-octoxy, 4-decyloxy, 4-dodecyloxy, 4-benzyloxy, 4,2',4'-trihydroxy and 2'-hydroxy-4,4'-dimethoxy derivatives.

2.3. Esters of unsubstituted or substituted benzoic acids, for example 4-tert-butyl-phenyl salicylate, phenyl salicylate, octylphenyl salicylate, dibenzoylresorcinol, bis(4-tert-butylbenzoyl)resorcinol, benzoylresorcinol, 2,4-di-tert-butylphenyl 3,5-di-tert-butyl-4-hydroxybenzoate, hexadecyl 3,5-di-tert-butyl-4-hydroxybenzoate, octadecyl 3,5-di-tert-butyl-4-hydroxybenzoate, 2-methyl-4,6-di-tert-butylphenyl 3,5-di-tert-butyl-4-hydroxybenzoate.

2.4. Acrylates, for example ethyl and isooctyl α -cyano- β , β -diphenylacrylate, methyl α -carbomethoxycinnamate, methyl and butyl α -cyano- β -methyl-p-methoxycinnamate, methyl α -carbomethoxy-p-methoxycinnamate and N-(β -carbomethoxy- β -cyanovinyl)-2-methylindoline.

2.5. Nickel compounds, for example nickel complexes of 2,2'-thiobis[4-(1,1,3,3-tetramethylbutyl)phenol], such as the 1:1 and 1:2 complexes, if desired with additional ligands, such as n-butylamine, triethanolamine or N-cyclohexyldiethanolamine, nickel dibutyldithiocarbamate, nickel salts of monoalkyl esters, such as the methyl or ethyl esters of 4-hydroxy-3,5-di-tert-butylbenzylphosphonic acid, nickel complexes of ketoximes, such as of 2-hydroxy-4-methylphenyl undecyl ketoxime, and nickel complexes of 1-phenyl-4-lauroyl-5-hydroxypyrazole, if desired with additional ligands.

2.6. Oxamides for example 4,4'-di-*tert*-butoxyoxanamide, 2,2'-diethoxyoxanamide, 2,2'-di-octyloxy-5,5'-di-*tert*-butoxyoxanamide, 2,2'-didodecyloxy-5,5'-di-*tert*-butoxyoxanamide, 2-ethoxy-2'-ethyloxyoxanamide, N,N'-bis(3-dimethylaminopropyl)oxamide, 2-ethoxy-5-*tert*-butyl-2'-ethyloxyoxanamide and mixtures thereof with 2-ethoxy-2'-ethyl-5,4'-di-*tert*-butoxyoxanamide and mixtures of *ortho*- and *para*-ethoxy- and *ortho*- and *para*-ethoxy-disubstituted oxamides.

2.7. 2-(2-Hydroxyphenyl)-1,3,5-triazines for example 2,4,6-tris(2-hydroxy-4-octyloxyphenyl)-1,3,5-triazine, 2-(2-hydroxy-4-octyloxyphenyl)-4,6-bis(2,4-dimethylphenyl)-1,3,5-triazine, 2-(2,4-dihydroxyphenyl)-4,6-bis(2,4-dimethylphenyl)-1,3,5-triazine, 2,4-bis(2-hydroxy-4-propyloxyphenyl)-6-(2,4-dimethylphenyl)-1,3,5-triazine, 2-(2-hydroxy-4-octyloxyphenyl)-4,6-bis(4-methylphenyl)-1,3,5-triazine, 2-(2-hydroxy-4-dodecyloxyphenyl)-4,6-bis(2,4-dimethylphenyl)-1,3,5-triazine, 2-[2-hydroxy-4-(2-hydroxy-3-butoxypropoxy)phenyl]-4,6-bis(2,4-dimethylphenyl)-1,3,5-triazine, 2-[2-hydroxy-4-(2-hydroxy-3-octyloxypropoxy)phenyl]-4,6-bis(2,4-dimethylphenyl)-1,3,5-triazine.

3. Metal deactivators for example N,N'-diphenyloxalamide, N-salicylal-N'-salicyloylhydrazine, N,N'-bis(salicyloyl)hydrazine, N,N'-bis(3,5-di-*tert*-butyl-4-hydroxyphenyl)propionylhydrazine, 3-salicyloylamino-1,2,4-triazole, bis(benzylidene)oxalodihydrazide, oxanilide, isophthalodihydrazide, sebacobisphenylhydrazide, N,N'-diacetyl adipodihydrazide, N,N'-bissalicyloyloxalodihydrazide and N,N'-bissalicyloylthiopropionodihydrazide.

4. Peroxide scavengers for example esters of β -thiodipropionic acid, for example the lauryl, stearyl, myristyl and tridecyl esters, mercaptobenzimidazole, the zinc salt of 2-mercaptobenzimidazole, zinc dibutylthiocarbamate, dioctadecyl disulfide and pentaerythrityl tetrakis(β -dodecylmercapto)propionate.

5. Polyamide stabilizers for example copper salts in combination with iodides and/or phosphorus compounds and salts of divalent manganese.

6. Basic costabilizers for example melamine, polyvinylpyrrolidone, dicyandiamide, triallyl cyanurate, urea derivatives, hydrazine derivatives, amines, polyamides, polyurethanes, alkali and alkaline earth metal salts of higher fatty acids, for example zinc stearate, magnesium behenate, magnesium stearate, sodium ricinoleate, potassium palmitate, antimony pyrocatecholate and tin pyrocatecholate.

7. Nucleating agents for example 4-*tert*-butylbenzoic acid, adipic acid and diphenylacetic acid.

8. Fillers and reinforcing agents for example calcium carbonate, silicates, glass fibres, asbestos, talc, kaolin, mica, barium sulfate, metal oxides and hydroxides, carbon black and graphite.

9. Other additives for example plasticizers, lubricants, emulsifiers, pigments, optical brighteners, flameproofing agents, antistatic and blowing agents.

10. Benzofuranones and indolinones as described, for example, in US-A-4 325 663, US-A-4 338 244, US-A-5 175 312, US-A-5 216 052, US-A-5 252 643, DE-A-4 316 611, DE-A-4 316 622, DE-A-4 316 876, EP-A-0 589 639 or EP-A-0 591 102, or 3-[4-(2-acetoxyethoxy)phenyl]-5,7-di-*tert*-butyl-benzofuran-2-one, 5,7-di-*tert*-butyl-3-[4-(2-stearoyloxyethoxy)phenyl]benzofuran-2-one, 3,3'-bis[5,7-di-*tert*-butyl-3-(4-[2-hydroxyethoxy]phenyl)benzofuran-2-one], 5,7-di-*tert*-butyl-3-(4-ethoxyphenyl)benzofuran-2-one, 3-(4-acetoxy-3,5-dimethylphenyl)-5,7-di-*tert*-butylbenzofuran-2-one and 3-(3,5-dimethyl-4-pivaloyloxyphenyl)-5,7-di-*tert*-butylbenzofuran-2-one.

The granules according to the invention are suitable for the stabilization of organic polymers or plastics against thermal, oxidative or photoinduced degradation. Examples of such polymers are, but not limited to:

1. Polymers of monoolefins and diolefins, for example polypropylene, polyisobutylene, polybut-1-ene, poly-4-methylpent-1-ene, polyisoprene or polybutadiene, as well as polymers of cycloolefins, for instance of cyclopentene or norbornene, furthermore polyethylene (which can be crosslinked), for example high density polyethylene (HDPE), low density polyethylene (LDPE), linear low density polyethylene (LLDPE) and branched low density polyethylene (BLDPE).

Cycloolefins, i.e. polymers of monoolefins, as mentioned by way of example in the previous paragraph, in particular polyethylene and polypropylene, can be prepared by various processes, in particular by the following methods:

a) by means of free radicals (usually at high pressure and high temperature)

b) by means of a catalyst where the catalyst usually contains one or more metals from group IVb, Vb, Vlb or VIII. These metals usually contain one or more ligands such as oxides, halides, alkoxides, esters, ethers, amines, alkyls, alkenyls and/or aryls which can be either π - or σ -coordinated. These metal complexes can be free or fixed to supports, for example to activated magnesium chloride, titanium(III) chloride, aluminum oxide or silicon oxide. These catalysts can be soluble or insoluble in the polymerization medium. The catalysts can be active as such in the polymerization or further activators can be used, for example metal alkyls, metal hydrides, metal alkyl halides, metal alkyl oxides or metal alkyl oxanes, where the metals are elements from groups Ia, IIa and/or IIIa. The activators can have been modified, for example, by means of further ester, ether, amine or silyl ether groups. These catalyst systems are usually known as Phillips, Standard Oil Indiana, Ziegler (-Natta), TNZ (DuPont), metallocene or single site catalysts (SSC).

2. Mixtures of the polymers mentioned under 1) for example mixtures of polypropylene with polyisobutylene, polypropylene with polyethylene (for example PP/HDPE, PP/LDPE) and mixtures of different types of polyethylene (for example LDPE/HDPE).

3. Copolymers of monoolefins and diolefins with each other or with other vinyl monomers, for example ethylene-propylene copolymers, linear low density polyethylene (LLDPE) and its mixtures with low density polyethylene (LDPE), propylene-but-1-ene, propylene-isobutylene, ethylene-but-1-ene, ethylene-hexene, ethylene-methylpentene, ethylene-heptene, ethylene-octene, propylene-butadiene, isobutylene-isoprene, ethylene-alkyl acrylate, ethylene-alkyl methacrylate, ethylene-vinyl acetate copolymers or copolymers thereof with carbon monoxide or ethylene-acrylic acid copolymers and their salts (ionomers) and terpolymers of ethylene with propylene and a diene, such as hexadiene, dicyclopentadiene or ethylenenorbornene, as well as mixtures of such copolymers and their mixtures with polymers mentioned in 1), for example polypropylene-ethylene-propylene copolymers, LDPE-ethylene-vinyl acetate copolymers, LDPE-ethylene-acrylic acid copolymers, LLDPE-ethylene-vinyl acetate copolymers, LLDPE-ethylene-acrylic acid copolymers and polyalkylene-carbon monoxide copolymers with an alternating or random structure, and mixtures thereof with other polymers, for example polyamides.

4. Hydrocarbon resins (for example C_5 - C_9), including hydrogenated modifications thereof (for example tackifying resins) and mixtures of polyalkylenes and starch.

5. Polystyrene, poly(p-methylstyrene), poly(α -methylstyrene).

6. Copolymers of styrene or α -methylstyrene with dienes or acrylic derivatives, for example styrene-butadiene, styrene-acrylonitrile, styrene-alkyl methacrylate, styrene-butadiene-alkyl acrylate, styrene-maleic anhydride, styrene-acrylonitrile-methyl acrylate, high impact strength mixtures of styrene copolymers and another polymer, for example a polyacrylate, a diene polymer or an ethylene-propylene-diene terpolymer, and block copolymers of styrene, for example styrene-butadiene-styrene, styrene-isoprene-styrene, styrene-ethylene/butylene-styrene or styrene-ethylene/propylene-styrene.

7. Graft copolymers of styrene or α -methylstyrene, for example styrene on polybutadiene, styrene on polybutadiene-styrene or polybutadiene-acrylonitrile copolymers, styrene and acrylonitrile (or methacrylonitrile) on polybutadiene, styrene, acrylonitrile and methyl methacrylate on polybutadiene, styrene and maleic anhydride on polybutadiene, styrene, acrylonitrile and maleic anhydride or maleimide on polybutadiene, styrene and maleimide on polybutadiene, styrene and alkyl acrylates or methacrylates on polybutadiene, styrene and acrylonitrile on ethylene-propylene-diene terpolymers, styrene and acrylonitrile on polyalkyl acrylates or polyalkyl methacrylates, styrene and acrylonitrile on acrylate-butadiene copolymers, as well as mixtures thereof with the copolymers mentioned under 6), for instance the copolymer mixtures known as ABS, MBS, ASA or AES polymers.

8. Halogen-containing polymers, such as polychloroprene, chlorinated rubber, chlorinated or chlorosulfonated polyethylene, copolymers of ethylene and chlorinated ethylene, epichlorohydrin homo- and copolymers, in particular polymers from halogen-containing vinyl compounds, for example polyvinyl chloride, polyvinylidene chloride, polyvinyl fluoride, polyvinylidene fluoride, as well as copolymers thereof, for example vinyl chloride-vinylidene chloride, vinyl chloride-vinyl acetate or vinylidene chloride-vinyl acetate.

9. Polymers derived from α , β -unsaturated acids and derivatives thereof, such as polyacrylates and polymethacrylates, polymethacrylates, polyacrylamides and polyacrylonitriles which have been impact modified by means of butyl acrylate.

11. Copolymers of the monomers mentioned under 9, with each other or with other unsaturated monomers, for instance acrylonitrile-butadiene, acrylonitrile-styrene, acrylate, acrylonitrile-alkoxyalkyl acrylate or acrylonitrile-vinyl halide copolymers or acrylonitrile-alkyl methacrylate-butadiene terpolymers.

12. Polymers derived from unsaturated alcohols and amines, or acyl derivatives thereof or acetals thereof, such as polyvinyl alcohol, polyvinyl acetate, polyvinyl stearate, polyvinyl benzoate, polyvinyl maleate, polyvinyl butyral, polyallyl phthalate or polyallyl melamine, and their copolymers with olefins mentioned in point 1.

13. Homopolymers and copolymers of cyclic ethers, such as polyalkylene glycols, polyethylene oxide, polypropylene oxide or copolymers thereof with bisglycidyl ethers.

14. Polyacetals, such as polyoxymethylene and those polyoxymethylenes which contain comonomers, for example ethylene oxide, polyacetals modified with thermoplastic polyurethanes, acrylates or MBS.

15. Polyphenylene oxides and sulfides, and mixtures thereof with styrene polymers or polyamides.

16. Polyurethanes derived from polyethers, polyesters or polybutadienes with terminal hydroxyl groups on the one hand and aliphatic or aromatic polyisocyanates on the other, and precursors thereof.

17. Polyamides and copolyamides derived from diamines and dicarboxylic acids and/or from aminocarboxylic acids or the corresponding lactams, such as nylon 4, nylon 6, nylon 6,6, 6,10, 6,9, 6,12, 4,6, and 12,12, nylon 11, nylon 12, aromatic polyamides obtained from m-xylene, diamine and adipic acid, polyamides prepared from hexamethylenediamine and isophthalic and/or terephthalic acid and optionally an elastomer as modifier, for example poly-2,4,4-trimethylhexamethylene terephthalamide or poly-m-phenylene isophthalamide. Block copolymers of the aforementioned polyamides with polyolefins, olefin copolymers, ionomers or chemically bonded or grafted elastomers, or with polyethers, for instance with polyethylene glycol, polypropylene glycol or polytetramethylene glycol. Further, EPDM- or ABS-modified polyamides or copolyamides, and polyamides condensed during processing ("RIM polyamide systems").

18. Polyureas, polyimides, polyamide-imides and polybenzimidazoles.

19. Polyesters derived from dicarboxylic acids and diols and/or from hydroxycarboxylic acids or the corresponding lactones, such as polyethylene terephthalate, polybutylene terephthalate, poly-1,4-dimethylolcyclohexane terephthalate and polyhydroxybenzoates as well as block polyether-esters derived from polyethers having hydroxyl end groups, also polycarbonate- or MBS-modified polyesters.

20. Polycarbonates and polyester carbonates.

21. Polysulfones, polyether sulfones and polyether ketones.

22. Crosslinked polymers derived from aldehydes on the one hand and phenols, urea or melamine on the other, such as phenol-formaldehyde resins, urea-formaldehyde resins and melamine-formaldehyde resins.

23. Drying and non-drying alkyd resins.

24. Unsaturated polyester resins derived from copolyesters of saturated and unsaturated dicarboxylic acids with polyhydric alcohols, and vinyl compounds as crosslinking agents, and also halogen-containing modifications thereof of low inflammability.

25. Crosslinkable acrylic resins, derived from substituted acrylic esters, for example epoxy acrylates, urethane acrylates or polyester acrylates.

26. Alkyd resins, polyester resins or acrylate resins crosslinked with melamine resins, urea resins, polyisocyanates or epoxy resins.

27. Crosslinked epoxy resins derived from polyepoxides, for example from bisglycidyl ethers or from cycloaliphatic diepoxides.

27 Natural polymers such as cellulose, natural rubber, gelatin and derivatives thereof which are chemically modified in a polymer-homologous manner such as cellulose acetates, cellulose propionates and cellulose butyrates or cellulose ethers such as methylcellulose and colophony resins and derivatives

28 Mixtures (polyblends) of polymers as mentioned above for example PP/EPDM, polyamide/EPDM or ABS/PVC/EVA, PVC/ABS, PVC/MBS, PC/ABS, PBTP/ABS, PC/ASA, PC/PBT, PVC/CPE, PVC/acrylates, POM/thermoplastic PUR, PC/thermoplastic PUR, POM/acrylate, POM/MBS, PPO/HIPS, PPO/PA 6.6 and copolymers PA/HDPE, PA/PP, PA/PPO

29 Natural and synthetic organic substances which are pure monomeric compounds or mixtures thereof for example mineral oils, animal or vegetable fats, oils and waxes or oils, waxes and fats based on synthetic esters (for example phthalates, adipates, phosphates or trimellitates) and blends of synthetic esters with mineral oils in any desired weight ratios, as used, for example, as spinning preparations, and aqueous emulsions thereof

30 Aqueous emulsions of natural or synthetic rubbers, for example natural rubber latex or latexes of carboxylated styrene-butadiene copolymers

The invention therefore furthermore relates to a composition comprising an organic polymer which is sensitive to thermal, oxidative or photoinduced degradation and the granules according to the invention. Surprisingly, the polymers stabilized by means of the granules according to the invention have higher stability than polymers stabilized by means of a conventional additive mixture. Polymers comprising the granules according to the instant invention may additionally comprise one or more conventional further plastics additives; preferably such additives are selected from the group consisting of sterically hindered amines (HALS), sterically hindered phenols, phosphites or phosphonites, hydrotalcites, metal oxides, metal carbonates, further metal soaps, antistatics, antiblocking agents, flameproofing agents, thioesters, internal and external lubricants, pigments, UV absorbers and further light stabilizers. The preferred compounds (and a detailed description) are as mentioned for the low-dust granules. The further plastics additive or additives may be in any convenient physical form, e.g. crystalline, powder, pellets, granules, dispersions or liquids. It is also possible that the polymer comprises more than one granulate according to the instant invention.

Preferred organic polymers are synthetic polymers and in particular the polymers from group 1, especially polyethylene and polypropylene.

The granules are expediently added to the organic polymers to be stabilized in amounts of from 0.01 to 10 %, preferably from 0.01 to 5 %, based on the total weight of the organic polymer to be stabilized.

The granules according to the invention and any further additives can be incorporated into the organic polymer by known methods, for example before or during molding or by applying the dissolved or dispersed granules to the polymer, if necessary with subsequent evaporation of the solvent. The granules can also be used for the production of so-called masterbatches.

The method for the stabilization of an organic polymer comprising incorporating into said polymer an effective stabilizing amount, as described above, of the low-dust granules is another object of the instant invention. The preferred embodiments for the low-dust granules and the polymer apply analogously.

The polymer stabilized in this way can be converted into a wide variety of forms in a conventional manner, for example into films, fibers, tapes, molding compositions or profiles.

The examples below illustrate the invention in greater detail and are not to be construed to limit the instant invention in any way. In these examples, as in the remainder of the description, parts are by weight and percentages are percent by weight, and "t" denotes a tert-butyl radical.

Example 1

Calcium stearate powder (Radiastar® 1060, FINA, DE) is fed gravimetrically at a throughput of 20 kg/h by means of a metering unit to a twin-screw extruder (type DNDL44, Bühler, CH). The extruder is thermostated and has the following temperature profile: 18°C/18°C/200°C/200°C/230°C/230°C/230°C/175°C/175°C/175°C. The nozzle temperature is 180°C. The degassing (removal of the steam) takes place in the 5th zone. The product is extruded through 8 nozzles having a diameter of 2 mm at a screw speed of 135 rpm. Immediately after the nozzles, the extrudates in the plastic state (10 000 to 100 000 Pa·s) are cut and are subsequently cooled to 30°C in a fluidized-bed condenser by means of air at 21°C.

The granules according to the invention used in this way have a rounded and quite regular shape and have very favorable bulk material properties (Table 1), in particular compared with the powder employed.

die Granulate sollten zylindrisch sein!

Table 1

	Granules	Powder
Particle size: shortest length ¹	>1	<0.05 [mm]
Particle size: longest length ¹	2-6	<0.1 [mm]
Loose bulk density	650	200 [g/l]
Pour time (TR15) ²	6.6	* [s]
Water content ³	0.6	3.1 [%]
Dust emission (5 min) ⁴	0.08	>1 [%]
Angle of repose ⁵	32	52 [degree]

¹According to ISO 3435 ²According to DIN 53492 ³Determined by the Karl Fischer method ⁴According to the Heubach test ⁵According to ISO 4324 *Not flowable

Example 2

70 parts of calcium stearate powder (Radiastar® 1060 FINA DE) and 30 parts of Irganox® 1076 (octadecyl ester of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid, Ciba CH) are homogeneously mixed in a Loedige mixer. The mixture is fed gravimetrically at a throughput of 100 kg/h by means of a metering unit to a twin-screw extruder (type DNDF93 Bühler CH). The extruder is thermostated and has the following temperature profile: 21°C/205°C/205°C/205°C/80°C/80°C/30°C/15°C/15°C/15°C. The nozzle temperature is 180°C. The product is extruded through 30 nozzles having a diameter of 2 mm at a screw speed of 45 rpm. Immediately after the nozzles, the extrudates are cut in the plastic state and subsequently cooled to 30°C in a fluidized-bed condenser using air at 21°C.

The granules according to the invention produced in this way have a rounded and fairly regular shape and have very favorable bulk-material properties (Table 2: Granules 2).

Example 3

40 parts of calcium stearate powder (Radiastar® 1060 FINA DE), 30 parts of Irganox® 1010 (pentaerythritol ester of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid, Ciba CH) and 30 parts of Irgafos® 168 (tris-(2,4-di-tert-butylphenyl) phosphite, Ciba CH) are homogeneously mixed in a Loedige mixer. The mixture is fed gravimetrically at a throughput of 100 kg/h by means of a metering unit to a twin-screw extruder (type DNDF93 Bühler CH). The extruder is thermostated and has the following temperature profile: 21°C/240°C/240°C/240°C/220°C/220°C/200°C/15°C/15°C/15°C. The nozzle temperature is 150°C. The product is extruded through 8 nozzles having a diameter of 2 mm at a screw speed of 91 rpm. Immediately after the nozzles, the extrudates are cut in the plastic state and subsequently cooled to 30°C in a fluidized-bed condenser using air at 21°C.

The granules according to the invention produced in this way have a rounded and fairly regular shape and have very favorable bulk-material properties (Table 2: Granules 3).

Table 2

	Granules 2	Granules 3
Particle size: shortest length ¹	>1	>1 [mm]
Particle size: longest length ¹	2-4.5	2-4.5 [mm]
Loose bulk density	545	580 [g/l]
Pour time (TR15) ²	9.9	8.5 [s]
Water content ³	1.1	1.8 [%]
Dust emission (5 min) ⁴	0.02	0.07 [%]
Angle of repose ⁵	40	37 [degree]

¹According to ISO 3435 ²According to DIN 53492 ³Determined by the Karl Fischer method and standardized to 100% calcium stearate ⁴According to the Heubach test ⁵According to ISO 4324

Example 4

1.5 g of Irganox® B 215 (1:2 mixture of pentaerythritol ester of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid and tris-(2,4-di-tert-butylphenyl) phosphite, Ciba CH) are mixed with 0.75 g of calcium stearate granules (prepared as described in Example 1) and 1500 g of polypropylene powder for 2 minutes in a water-cooled fluid mixer. A comparative

mixture is prepared analogously but this contains 0.75 g of pulverulent calcium stearate (Radiastar® 1060 FINA DE)

The mixtures are each extruded 5 times in a 20d screw extruder at a maximum temperature of 260°C. After the first, third and fifth extrusions, the MFI value (230°C, 2.15 kg, analogously to ISO 1133) is determined and in addition the yellowness index is determined after the fifth extrusion on press sheets with a thickness of 2 mm.

Table 3.

Mixture	1st	MFI	5th extrusion	YI
Calcium stearate from Ex. 1	4.7	6.1	7.7	4.9
Pulverulent calcium stearate	5.0	6.6	8.5	5.7

The lower MFI and YI values clearly show that better stabilization is achieved using the calcium stearate granules according to the invention than using conventional pulverulent calcium stearate.

Example 5:

2.25 g of granules according to the invention extruded at 180°C comprising 22.2 parts of Irganox® 1010 (pentaerythrityl ester of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid; Ciba CH), 44.5 parts of Irgafos® 168 (tris-(2,4-di-tert-butylphenyl) phosphite; Ciba CH) and 33.3 parts of calcium stearate are mixed with 1500 g of polypropylene powder for 2 minutes in a water-cooled fluid mixer.

The mixture is extruded 5 times in a 20d screw extruder at a maximum temperature of 260°C. After the fifth extrusion, the yellowness index is determined on pressed sheets with a thickness of 2 mm. A YI value of 3.3 is obtained.

Example 6:

0.75 g of granules according to the invention extruded at 180°C comprising 66.7 parts of Irganox® 1010 (pentaerythrityl ester of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid; Ciba CH) and 33.3 parts of calcium stearate and 1.5 g of granules according to the invention extruded at 180°C comprising 66.7 parts of Irgafos® 168 (tris-(2,4-di-tert-butylphenyl) phosphite; Ciba CH) and 33.3 parts of calcium stearate are mixed with 1500 g of polypropylene powder for 2 minutes in a water-cooled fluid mixer.

The mixture is extruded 5 times in a 20d screw extruder at a maximum temperature of 260°C. After the fifth extrusion, the yellowness index is determined on pressed sheets with a thickness of 2 mm. A YI value of 4.6 is obtained.

Example 7:

1.125 g of granules according to the invention extruded at 180°C comprising 66.7 parts of Irganox® 1010 (pentaerythrityl ester of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid; Ciba CH) and 33.3 parts of calcium stearate and 1.125 g of granules according to the invention extruded at 180°C comprising 66.7 parts of Irgafos® 168 (tris-(2,4-di-tert-butylphenyl) phosphite; Ciba CH) and 33.3 parts of calcium stearate are mixed with 1500 g of polypropylene powder for 2 minutes in a water-cooled fluid mixer.

The mixture is extruded 5 times in a 20d screw extruder at a maximum temperature of 260°C. After the fifth extrusion, the yellowness index is determined on pressed sheets with a thickness of 2 mm. A YI value of 4.8 is obtained.

Example 8:

1.5 g of Irganox® B 215 (1:2 mixture of pentaerythrityl ester of β -(3,5-di-tert-butyl-4-hydroxyphenyl)propionic acid and tris-(2,4-di-tert-butylphenyl) phosphite; Ciba CH; extruded in form of granules) are mixed with 0.75 g of calcium stearate granules (prepared as described in Example 1) and 1500 g of polypropylene powder for 2 minutes in a water-cooled fluid mixer.

The mixture is extruded 5 times in a 20d screw extruder at a maximum temperature of 260°C. After the fifth extrusion, the yellowness index is determined on pressed sheets with a thickness of 2 mm. A YI value of 4.7 is obtained.

Claims

1. A low-dust granule of plastic additives, comprising at least 10 % by weight of calcium stearate, where the water content of the calcium stearate is less than 2 %, having a particle size distribution, in accordance with ISO 3435.

of from 1 mm to 10 mm, a loose bulk density of greater than 400 g/l and a flowability in accordance with DIN 53492 of less than 15 s (FR25).

2. A low-dust granule according to claim 1, comprising at least 20% by weight of calcium stearate
3. A low-dust granule according to claim 2, comprising 100% calcium stearate
4. A low-dust granule according to claim 1, having a particle size distribution in accordance with ISO 3435 of from 1 mm to 6 mm
5. A low-dust granule according to claim 1, wherein the water content of the calcium stearate is less than 1%
6. A low-dust granule according to claim 1, further comprising a compound selected from the group consisting of a sterically hindered amine, a sterically hindered phenol, a phosphite or phosphonite, a hydrotalcite, a metal oxide or carbonate, a further metal soap, an antistatic, an antiblocking agent, a flameproofing agent, a thioester, an internal and external lubricant, a pigment, a UV absorber and a further light stabilizer, or mixtures thereof
7. A low-dust granule according to claim 1, further comprising a sterically hindered phenol and a phosphite or phosphonite
8. A low dust granule according to claim 7, wherein the sterically hindered phenol is tetrakis-[3-(3,5-di-tert-butyl-4-hydroxyphenyl)-propionyloxy-methyl]methane and the phosphite is tris(2,4-di-tert-butylphenyl) phosphite
9. A process for the production of a granule of one or more plastic additives, wherein said granule comprises at least 10% by weight of calcium stearate, wherein the water content of the calcium stearate is less than 2%, having a particle size distribution in accordance with ISO 3435 of from 1 mm to 10 mm, a loose bulk density of greater than 400 g/l and a flowability in accordance with DIN 53492 of less than 15 s (FR25), said process comprising
 - (a) warming a mixture of plastic additives comprising at least 10% and up to 100% by weight of calcium stearate until at least 80% by weight of the calcium stearate is melted
 - (b) pressing the resultant melt through a plate provided with nozzles or holes, wherein the nozzle or hole diameter is from 1 to 10 mm, and
 - (c) forming granules from the resultant extrudate while it is in the plastic state
10. A process according to claim 9, wherein a peak temperature of said additive mixture of above 130°C is achieved during the process
11. A process according to claim 9, wherein a peak temperature of said additive mixture of above 150°C is achieved during the process
12. A process according to claim 9, further comprising degassing said melt
13. A process according to claim 9, wherein said additives mixture comprises calcium stearate, a sterically hindered phenol and a phosphite or phosphonite
14. A process according to claim 13, wherein said additives mixture comprises calcium stearate, tetrakis-[3-(3,5-di-tert-butyl-4-hydroxyphenyl)-propionyloxymethyl]methane and tris(2,4-di-tert-butylphenyl) phosphite
15. A method for the stabilization of an organic polymer comprising incorporating into said polymer a granule according to claim 1
16. A method for the stabilization of an organic polymer comprising incorporating into said polymer a granule produced in accordance with the process of claim 9
17. A composition comprising an organic polymer and a granule according to claim 1

18. A composition according to claim 17 wherein the organic polymer is polyethylene or polypropylene
19. A composition comprising an organic polymer and a granule produced by the process according to claim 9
- 5 20. A composition according to claim 19 wherein the organic polymer is polyethylene or polypropylene

10

15

20

25

30

35

40

45

50

55



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 719 824 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3
25.02.1998 Bulletin 1998/09

(43) Date of publication A2
03.07.1996 Bulletin 1996/27

(21) Application number 95810801.1

(22) Date of filing 18.12.1995

(84) Designated Contracting States
AT BE CH DE DK ES FR GB IT LI NL PT SE

(30) Priority 28.12.1994 US 365262
12.04.1995 US 420388

(71) Applicant Ciba Specialty Chemicals Holding Inc.
4057 Basel (CH)

(51) Int Cl⁶ C08K 5/00, C08K 3/00
// (C08K5/00, 5:098, 5:13,
5:3435, 5:52),
(C08K3/00, 3:22, 3:26, 3:34)

(72) Inventors
• Thibaut, Daniel
F-68730 Michelbach-le-Bas (FR)
• Breitenstein, Benjamin
CH-4310 Rheinfelden (CH)
• Kirchberger, Linda
Franklin Lakes, New Jersey 07417 (US)

(54) **Low-dust granules of plastic additives**

(57) Low-dust granules of plastic additives comprising at least 10 % by weight of calcium stearate where the water content of the calcium stearate is less than 2 % having a particle size distribution in accordance with ISO 3435 of from 1 mm to 10 mm a loose bulk density of greater than 400 g/l and a flowability in accordance with DIN 53492 of less than 15 s (IR25) a process for their production, and the use of these granules for the stabilization of organic polymers

ance with ISO 3435 of from 1 mm to 10 mm a loose bulk density of greater than 400 g/l and a flowability in accordance with DIN 53492 of less than 15 s (IR25) a process for their production, and the use of these granules for the stabilization of organic polymers

EP 0 719 824 A3

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 81 0801

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 6)
A	EP 0 565 184 A (ENICHEM) * page 3, line 29 - line 30: claims 1-4; examples 2,4 *	1.7, 10, 15	C08K5/00 C08K3/00 B01J2/20 C08K13/02 /(C08K5/00,
A.D	EP 0 514 784 A (ENICHEM) * page 3, line 19 - line 27: claims 1.4-6.8: examples 1-3.5.9.10.12 *	1.2.6	5:098.5:13. 5:3435.5:52). (C08K3/00, 3:22,3:26. 3:34). (C08K13/02, 3:00.5:098)
A	EP 0 086 362 A (MALLINCKRODT) * claims 1.3.13.21 *	1.3	

TECHNICAL FIELDS
SEARCHED (Int. Cl. 6)B01J
C08K

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
THE HAGUE	6 January 1998	Engel, S
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background P: non-written disclosure I: intermediate document F: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date C: document cited in the application L: document cited for other reasons S: member of the same patent family, corresponding document		